

EDD-100M



Household extractor fans with a modern appearance and design

- Elegant, aerodynamic design.
- Architectural integration with the bathroom elements.
- Ultra-silent.
- High performance.
- Can be easily and quickly installed.

Construction:

- Front with a matte aluminium finish.
- Made of high quality ABS plastic material.
- IP34 protection.

Motor:


- Single-phase 220/240V-50/60 Hz, except model 150, with 220/240V-50 Hz.
- High efficiency motor.
- Designed for continuous operation and requires no maintenance.
- Motor fitted with thermal protection.

Version:

- BASIC: operates with a light switch or a separate switch.
- TIMER: Operates with an adjustable electronic timer.



CHARACTERISTIC CURVE AT 1.2KG/M³

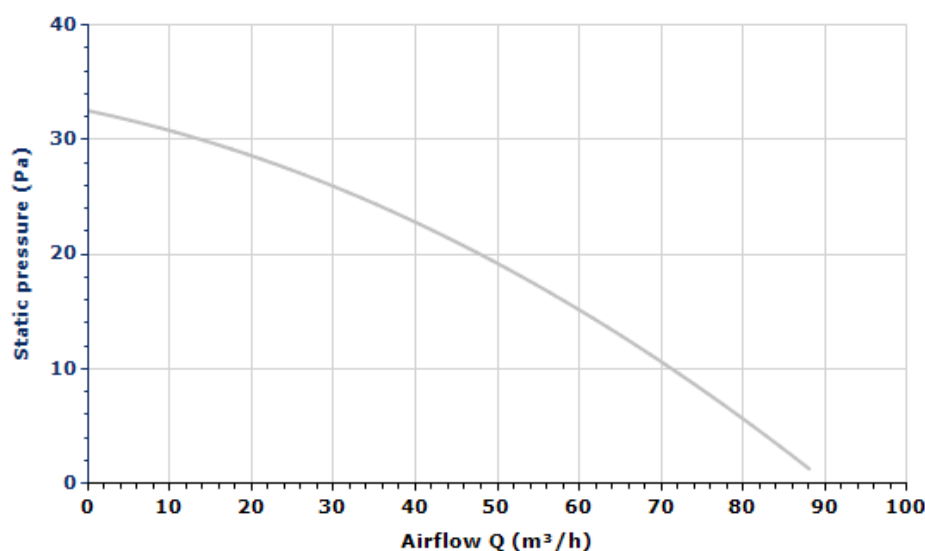

Design Point

Q (m³/h)	
Ps (Pa)	

Service Point (SP)

Q (m³/h)	
Ps (Pa)	
Pd (Pa)	
Pt (Pa)	
Impeller (rpm)	
Max. Temp. (°C)	
Outlet air speed (m/s)	

TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	88
Speed (rpm)	2300
Approx. weight (kg)	0.60

ERP

Remarks	ErP Exclude. Pe < 125 W
---------	-------------------------

MOTOR DATA

Max. Electrical Power (kW)	0.01
Hz/phases	50/1
Motor (rpm)	2300
Max. current (A) 220-240 V	0.09
Motor protection	IP34

Data can change, please check motor plate

AVAILABLE ACCESSORIES

No available accessories.

DIMENSIONS

Ø D	B	H	L	L1
100	152	120	126	30

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

