

## EDD-125M-T



### Household extractor fans with a modern appearance and design

- Elegant, aerodynamic design.
- Architectural integration with the bathroom elements.
- Ultra-silent.
- High performance.
- Can be easily and quickly installed.

### Construction:

- Front with a matte aluminium finish.
- Made of high quality ABS plastic material.
- IP34 protection.

### Motor:


- Single-phase 220/240V-50/60 Hz, except model 150, with 220/240V-50 Hz.
- High efficiency motor.
- Designed for continuous operation and requires no maintenance.
- Motor fitted with thermal protection.

### Version:

- BASIC: operates with a light switch or a separate switch.
- TIMER: Operates with an adjustable electronic timer.



## CHARACTERISTIC CURVE AT 1.2KG/M<sup>3</sup>

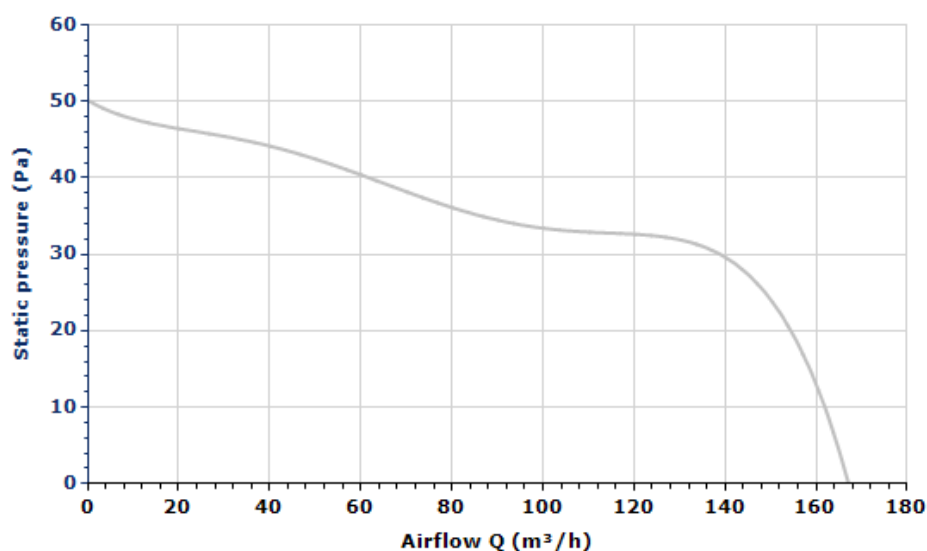

### Design Point

Q (m³/h)	
Ps (Pa)	

### Service Point (SP)

Q (m³/h)	
Ps (Pa)	
Pd (Pa)	
Pt (Pa)	
Impeller (rpm)	
Max. Temp. (°C)	
Outlet air speed (m/s)	

## TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	167
Speed (rpm)	2400
Approx. weight (kg)	0.70

## ERP

Remarks	ErP Exclude. Pe < 125 W
---------	-------------------------

## MOTOR DATA

Max. Electrical Power (kW)	0.02
Hz/phases	50/1
Motor (rpm)	2400
Max. current (A) 220-240 V	0.10
Motor protection	IP34

Data can change, please check motor plate

## AVAILABLE ACCESSORIES

No available accessories.

## DIMENSIONS

Ø D	B	H	L	L1
125	177	140	135	34

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

