



Caratteristiche:

Griglie di ripresa ad alette fisse inclinate di 45° passo 30 mm

Costruzione:

Acciaio zincato, o verniciato bianco RAL 9010 o grigio RAL 7035.

Su richiesta sono disponibili costruzioni in rame, acciaio inox AISI 304 o AISI 316 nelle finiture 2B o BA.

Impiego:

A parete, in ripresa.

Fissaggio:

- Fissaggio con clips o su richiesta con viti frontali.

Accessori:

- Plenum in acciaio zincato standard o isolato.
- Serranda di taratura in acciaio zincato con alette a movimento contrapposto.
- Controtelaio di montaggio in lamiera di acciaio zincato.

Characteristics:

Return grilles with fixed and 45° inclined bars 30 mm pitch.

Construction:

Galvanized steel, or painted in RAL 9010 (white) or RAL 7035 (grey).

Models made of copper, stainless steel AISI 304 and AISI 316, 2B or BA finish, are available on demand..

Utilization:

For wall installation and for air intake.

Fixing:

- Fixing by using clips or frontal screws on demand.

Accessories:

- Galvanized steel plenum, standard or insulated.
- Calibration damper made of galvanized steel and fins with opposite movement.
- Mounting counterframes made of galvanized steel sheet.

PREZZI / PRICES


	GR	GR-R	GR-R-SS	SC	CT	PBZ 1 PBZ 2	PBZI 1 PBZI 2	
BxH (mm)	€	€	€	€	€	€	€	
200x100	-	-	-	-	-	-	-	
300x100	-	-	-	-	-	-	-	
400x100	-	-	-	-	-	-	-	
500x100	-	-	-	-	-	-	-	
• 600x100	-	-	-	-	-	-	-	
• 800x100	-	-	-	-	-	-	-	
• 1000x100	-	-	-	-	-	-	-	
• 1200x100	-	-	-	-	-	-	-	
200x150	-	-	-	-	-	-	-	
300x150	-	-	-	-	-	-	-	
400x150	-	-	-	-	-	-	-	
500x150	-	-	-	-	-	-	-	
• 600x150	-	-	-	-	-	-	-	
• 800x150	-	-	-	-	-	-	-	
• 1000x150	-	-	-	-	-	-	-	
• 1200x150	-	-	-	-	-	-	-	
200x200	-	-	-	-	-	-	-	
300x200	-	-	-	-	-	-	-	
400x200	-	-	-	-	-	-	-	
500x200	-	-	-	-	-	-	-	
• 600x200	-	-	-	-	-	-	-	
• 800x200	-	-	-	-	-	-	-	
• 1000x200	-	-	-	-	-	-	-	
• 1200x200	-	-	-	-	-	-	-	
200x300	-	-	-	-	-	-	-	
300x300	-	-	-	-	-	-	-	
400x300	-	-	-	-	-	-	-	
500x300	-	-	-	-	-	-	-	
• 600x300	-	-	-	-	-	-	-	
• 800x300	-	-	-	-	-	-	-	
• 1000x300	-	-	-	-	-	-	-	
• 1200x300	-	-	-	-	-	-	-	
200x400	-	-	-	-	-	-	-	
300x400	-	-	-	-	-	-	-	
400x400	-	-	-	-	-	-	-	
500x400	-	-	-	-	-	-	-	
• 600x400	-	-	-	-	-	-	-	
• 800x400	-	-	-	-	-	-	-	
• 1000x400	-	-	-	-	-	-	-	
• 1200x400	-	-	-	-	-	-	-	
200x500	-	-	-	-	-	-	-	
300x500	-	-	-	-	-	-	-	
400x500	-	-	-	-	-	-	-	
500x500	-	-	-	-	-	-	-	
• 600x500	-	-	-	-	-	-	-	

• Rinforzo intermedio / Intermediate reinforcing





PREZZI / PRICES

BxH (mm)	€	€	€	€	€	€	€
• 800x500	-	-	-	-	-	-	-
• 1000x500	-	-	-	-	-	-	-
• 1200x500	-	-	-	-	-	-	-
200x600	-	-	-	-	-	-	-
300x600	-	-	-	-	-	-	-
400x600	-	-	-	-	-	-	-
500x600	-	-	-	-	-	-	-
• 600x600	-	-	-	-	-	-	-
• 800x600	-	-	-	-	-	-	-
• 1000x600	-	-	-	-	-	-	-
• 1200x600	-	-	-	-	-	-	-
200x800	-	-	-	-	-	-	-
300x800	-	-	-	-	-	-	-
400x800	-	-	-	-	-	-	-
500x800	-	-	-	-	-	-	-
• 600x800	-	-	-	-	-	-	-
• 800x800	-	-	-	-	-	-	-
• 1000x800	-	-	-	-	-	-	-
• 1200x800	-	-	-	-	-	-	-
• 595x595	-	-	-	-	-	-	-

Particolare di fissaggio della bocchetta sul contro telaio CT e serranda
Fixing detail of grille counter frame CT and damper



Plenum isolato esternamente a norma UNI ENV 12097/1999 in Polietilene adesivo CL1 spessore 6 mm
Plenum externally insulated according to UNI ENV 12097/1999 in Polyethylene adhesive film CL1 thickness 6 mm



DESCRIZIONI:

GR: Griglia di ripresa passo 30 mm
GR-R: Griglia di ripresa passo 30 mm con rete antivolatile
GR-R-SS: Griglia di ripresa passo 30 mm con rete antivolatile e serranda di sovrappressione a gravità

ESECUZIONI SU RICHIESTA:

- griglia con rete antisetto
- griglia completa di tegolo antipioggia

ACCESSORI:

SC: Serranda di taratura ad alette con movimento contapposto
CT: Controtelaio di fissaggio in lamiera d'acciaio zincata
PBZ: Plenum di raccordo

DESCRIPTIONS:

GR: Return grille: (30 mm between bars)
GR-R: Return grille: (30 mm between bars) with bird mesh
GR-R-SS: Return grille (30 mm between bars) with bird mesh and overpressure damper

AVAILABLE ON REQUEST:

- Grille with insect screen
- Grille with rain - proof panel

ACCESSORIES:

SC: Opposed blade damper
CT: Counterframes in galvanised steel sheet profile section
PBZ: Connecting plenum

DISEGNI / DRAWINGS

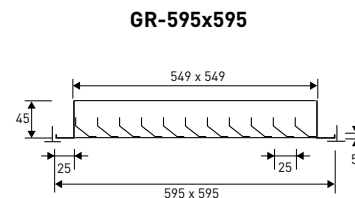
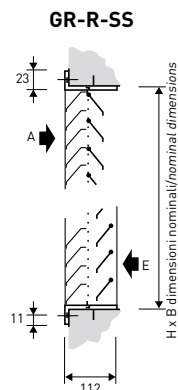


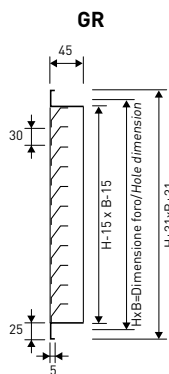


DIAGRAMMA SCELTA RAPIDA / QUICK SELECTION DIAGRAM

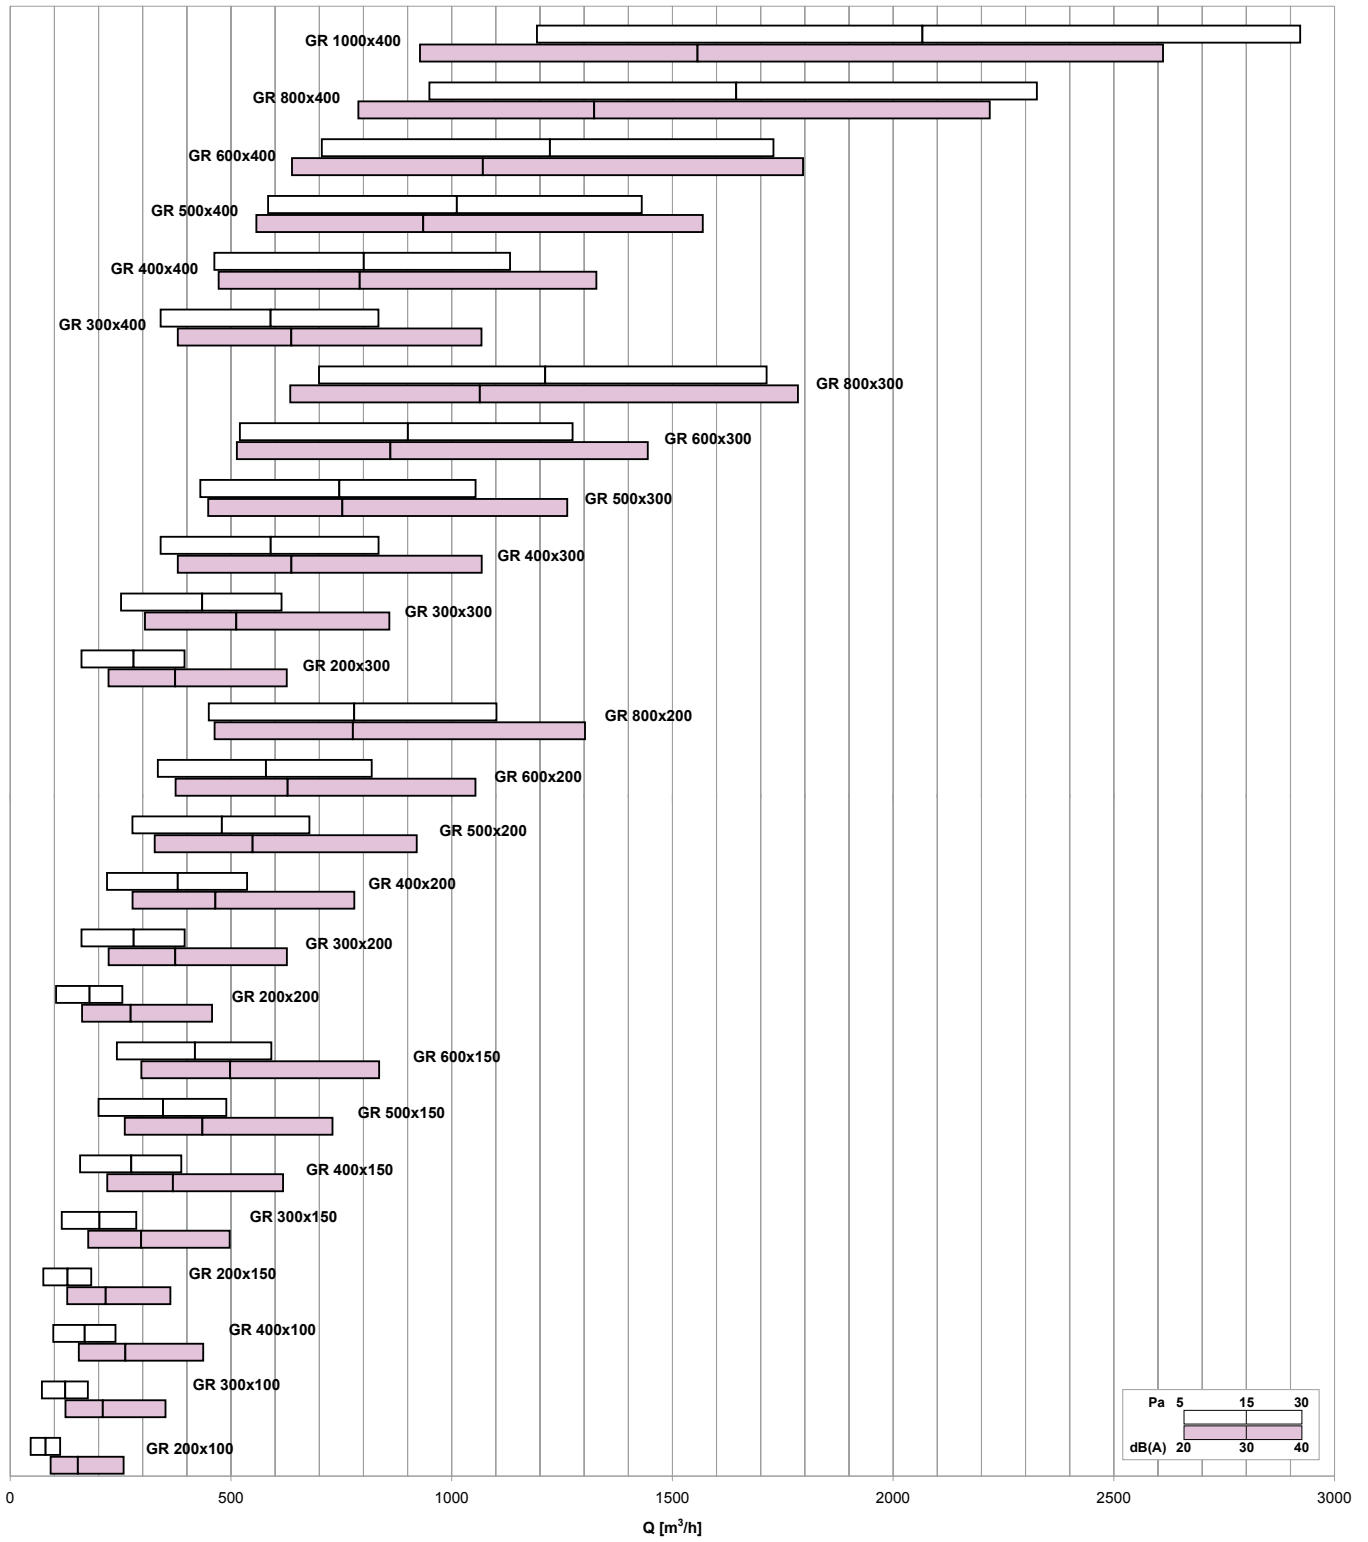


TABELLA DI SELEZIONE / SELECTION TABLE

Modello Model	A _v [m ²]	Q [m ³ /h]		L _{WA} [dB(A)]		Dp _t [Pa]	
		min	max	min	max	min	max
GR 200x100	0,0101	50	110	-	24	5	30
GR 300x100	0,0157	70	180	-	27	5	30
GR 400x100	0,0213	100	240	-	28	5	30
GR 500x100	0,0269	120	300	-	29	5	30
GR 600x100	0,0325	150	360	-	30	5	30
GR 800x100	0,0437	200	490	-	32	5	30
GR 1000x100	0,0548	250	620	-	34	5	30
GR 1200x100	0,0660	300	740	-	35	5	30
GR 200x150	0,0164	80	180	-	26	5	30
GR 300x150	0,0255	120	290	-	30	5	30
GR 400x150	0,0346	160	390	-	31	5	30
GR 500x150	0,0437	200	490	-	32	5	30
GR 600x150	0,0528	240	590	-	33	5	30
GR 800x150	0,0709	320	800	-	35	5	30
GR 1000x150	0,0891	410	1000	-	36	5	30
GR 1200x150	0,1073	490	1200	-	37	5	30
GR 200x200	0,0227	100	250	-	28	5	30
GR 300x200	0,0353	160	400	-	31	5	30
GR 400x200	0,0478	220	540	-	33	5	30
GR 500x200	0,0604	280	680	-	34	5	30
GR 600x200	0,0730	330	820	-	35	5	30
GR 800x200	0,0982	450	1100	-	37	5	30
GR 1000x200	0,1234	570	1380	21	38	5	30
GR 1200x200	0,1486	680	1670	22	39	5	30
GR 200x300	0,0352	160	400	-	31	5	30
GR 300x300	0,0548	250	610	-	33	5	30
GR 400x300	0,0744	340	830	-	35	5	30
GR 500x300	0,0940	430	1050	-	36	5	30
GR 600x300	0,1136	520	1270	20	38	5	30
GR 800x300	0,1528	700	1710	22	39	5	30
GR 1000x300	0,1920	880	2150	23	40	5	30
GR 1200x300	0,2312	1060	2590	24	41	5	30
GR 200x400	0,0478	220	540	-	33	5	30
GR 300x400	0,0744	340	830	-	35	5	30
GR 400x400	0,1010	460	1130	-	37	5	30
GR 500x400	0,1276	580	1430	21	38	5	30
GR 600x400	0,1542	710	1730	22	39	5	30
GR 800x400	0,2073	950	2330	24	41	5	30
GR 1000x400	0,2605	1190	2920	25	42	5	30
GR 1200x400	0,3137	1440	3520	26	43	5	30
GR 200x500	0,0603	280	680	-	34	5	30
GR 300x500	0,0939	430	1050	-	36	5	30
GR 400x500	0,1275	580	1430	21	38	5	30
GR 500x500	0,1611	740	1810	22	40	5	30
GR 600x500	0,1947	890	2180	23	41	5	30
GR 800x500	0,2619	1200	2940	25	42	5	30
GR 1000x500	0,3291	1510	3690	26	43	5	30
GR 1200x500	0,3963	1810	4450	27	45	5	30
GR 200x600	0,0729	330	820	-	35	5	30
GR 300x600	0,1135	520	1270	20	38	5	30
GR 400x600	0,1541	710	1730	22	39	5	30
GR 500x600	0,1947	890	2180	23	41	5	30
GR 600x600	0,2353	1080	2640	24	42	5	30
GR 800x600	0,3165	1450	3550	26	43	5	30
GR 1000x600	0,3977	1820	4460	27	45	5	30
GR 1200x600	0,4789	2190	5370	28	46	5	30
GR 200x800	0,0980	450	1100	-	37	5	30
GR 300x800	0,1526	700	1710	22	39	5	30
GR 400x800	0,2072	950	2320	24	41	5	30
GR 500x800	0,2618	1200	2940	25	42	5	30
GR 600x800	0,3164	1450	3550	26	43	5	30
GR 800x800	0,4256	1950	4770	28	45	5	30
GR 1000x800	0,5348	2450	6000	29	46	5	30
GR 1200x800	0,6440	2950	7220	30	47	5	30
GR 595x595	0,1957	900	2200	23	41	5	30