

EDMF-120-T



Extra flat bathroom extractor fans with a modern appearance and design

- Architectural integration with the bathroom elements.
- Ultra-silent.
- Slimline design at just 17 mm thick.
- High performance thanks to its aerodynamic design.
- Can be easily and quickly installed.

Construction:


- White finish.
- Non-return damper incorporated in all models.
- Made with recyclable materials.

Version:

- BASIC: Works with the light switch or independently.
- TIMER: Works with an adjustable electronic timer.
- LL: Long life ball bearings.



CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M³

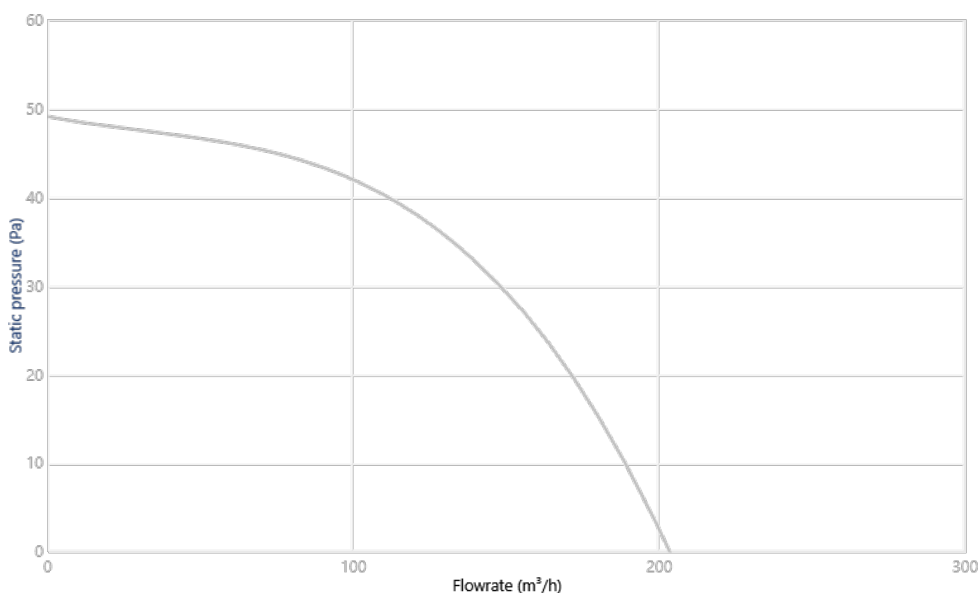


Design Point

Q (m³/h)	
Ps (Pa)	

Service Point (SP)

Q (m³/h)	-
Ps (Pa)	-
Pd (Pa)	-
Pt (Pa)	-

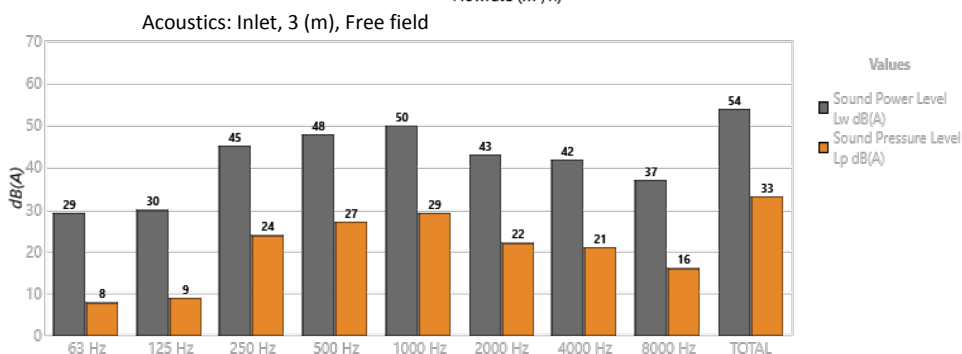

Band	Lw dB(A)	Lp dB(A)
63 Hz	29	8
125 Hz	30	9
250 Hz	45	24
500 Hz	48	27
1000 Hz	50	29
2000 Hz	43	22
4000 Hz	42	21
8000 Hz	37	16
TOTAL	54	33

TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	205
Speed (rpm)	2400
Maximum static pressure (Pa)	49.06
Maximum total pressure (Pa)	49.06

ERP

Remarks	ErP Exclude. Pe < 125 W
---------	-------------------------

MOTOR DATA

Max. Electrical Power (kW)	0.02
Hz/phases	50/1
Motor (rpm)	2400
Max. current (A) 220-240 V	0.1

Data can change, please check motor plate

DIMENSIONS

A	B	C	D
180	17	106	120

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

Approx. weight (kg)	0.7
---------------------	-----

