

# HCT-56-4T-0.75/PL

Code: 1002959



## Extremely robust tubular axial fans

Tubular wall mounted fans. PL version fitted with a plastic impeller and AL version with an aluminium impeller.



### Fan:

- Airflow direction from motor to impeller.
- PL version impellers in fibreglass reinforced polyamide-6 and AL version in cast aluminium. Models 40-2T and 45-2T only in AL version.
- Tubular casing in sheet steel with external terminal box.

### Motor:

- Motors with IE3 efficiency for powers equal to or greater than 0.75 kW, except single-phase, 2-speed and 8-pole.
- Class F motors with ball bearings. IP55 protection. Except single-phase models from size 45 to size 56, with IP54 protection. 1 or 2 speeds depending on model.
- Single-phase 230 V 50 Hz and three-phase 230/400 V 50 Hz (up to 4 kW) and 400/690 V 50 Hz (powers greater than 4 kW).
- Working temperature: -25 °C +50 °C.


### Finish:

- Anti-corrosive finish in polyester resin, polymerised at 190 °C, after degreasing with phosphate-free nanotechnology treatment.

### On request:

- Airflow direction from impeller to motor.
- 100% reversible impellers.
- Special windings for different voltages.
- ATEX certified Category 2.

## CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M<sup>3</sup>

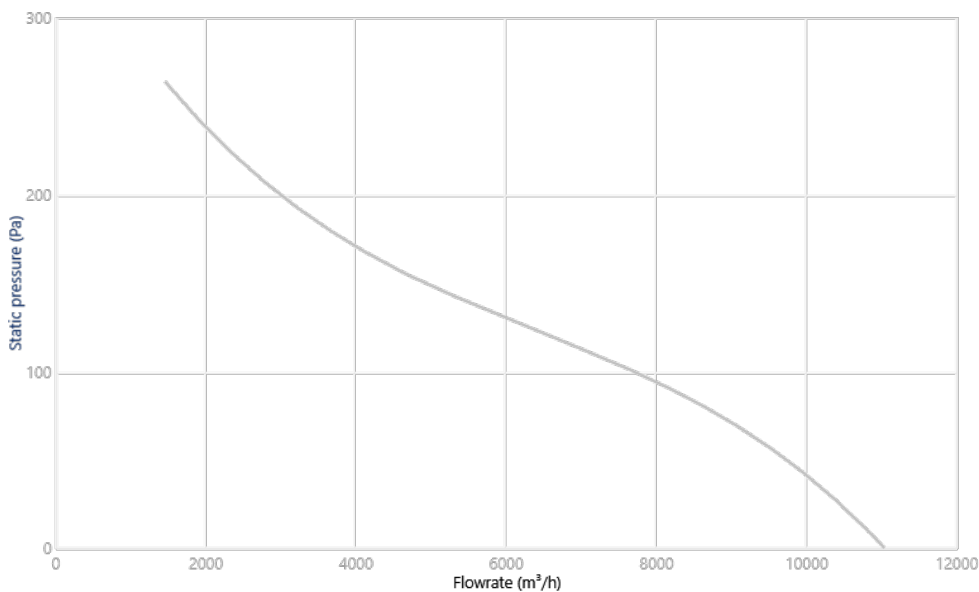


### Design Point

Q (m³/h)	
Ps (Pa)	

### Service Point (SP)

Q (m³/h)	-
Ps (Pa)	-
Pd (Pa)	-
Pt (Pa)	-

### Acoustics: Radiated, 3 (m), Free field

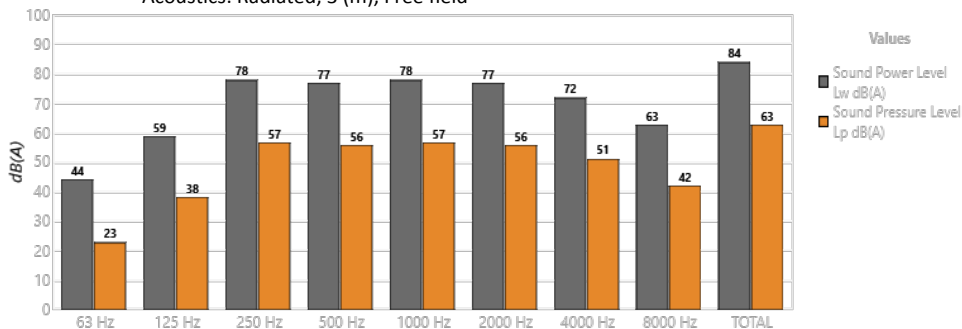

Band	Lw dB(A)	Lp dB(A)
63 Hz	44	23
125 Hz	59	38
250 Hz	78	57
500 Hz	77	56
1000 Hz	78	57
2000 Hz	77	56
4000 Hz	72	51
8000 Hz	63	42
TOTAL	84	63

## TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	11040
Speed (rpm)	1420
Maximum static pressure (Pa)	263.8
Maximum total pressure (Pa)	265.4

## ERP


Efficiency	33.2%
Efficiency grade N	40.6
Measurement category	A
Efficiency category	Static
Specific ratio	1.00
Flowrate (m³/h)	6808

Pressure (Pa)	116
Input power (kW)	0.660
Speed (rpm)	1405
Variable speed drive	VSD not necessary
ErP compliance	2015

♦ Data established at point of optimum efficiency

## MOTOR DATA

Rated Mechanical Power (kW)	0.55
Hz/phases	50/3
Motor (rpm)	1420
Poles	4P
Max. current (A) 380-415 V Y	1.25
Max. current (A) 220-240 V D	2.17
Motor protection	IP55
Motor frame size	80

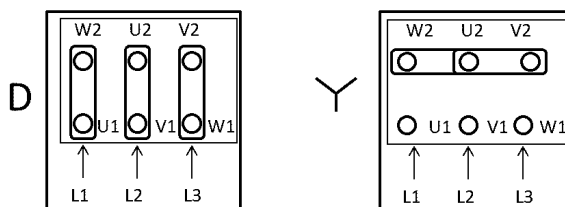

Data can change, please check motor plate

## DIMENSIONS

ØA	ØB	ØD	E	E1	ØJ	N
660	620	560	400	-	12	12x30°

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

Approx. weight (kg)	33
---------------------	----

