

CA/LINE-10

Code: 1129393



In-line circular duct extractor fans with 3 speed motors

Fan:

- Sheet steel casing.
- Backward curved impeller.
- External terminal box.
- Quick and easy to install.
- Support foot included.

Motor:


- 3-speed motors with long life ball bearings. IP44 protection.
- Single-phase 220-240 V 50/60 Hz.
- Working temperature: -25 °C +60 °C.

Finish:

- Galvanised steel sheet.



CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M³

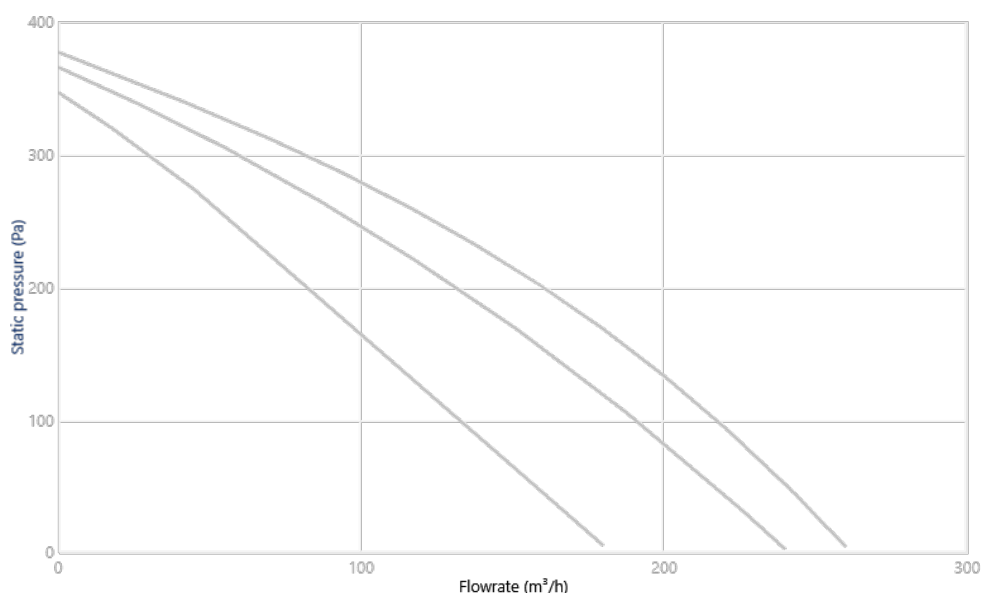


Design Point

Q (m³/h)	
Ps (Pa)	

Service Point (SP)

Q (m³/h)	-
Ps (Pa)	-
Pd (Pa)	-
Pt (Pa)	-

Acoustics: Radiated, 3 (m), Free field

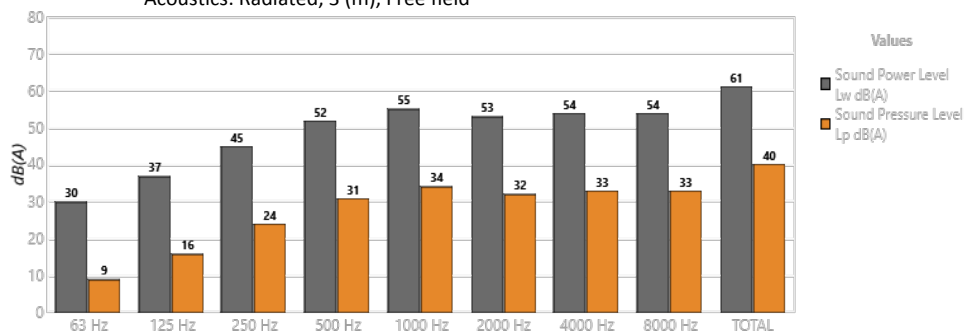

Band	Lw dB(A)	Lp dB(A)
63 Hz	30	9
125 Hz	37	16
250 Hz	45	24
500 Hz	52	31
1000 Hz	55	34
2000 Hz	53	32
4000 Hz	54	33
8000 Hz	54	33
TOTAL	61	40

TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	260
Speed (rpm)	2700
Maximum static pressure (Pa)	376.9
Maximum total pressure (Pa)	376.9

ERP


Brand	SODECA, S.L.U.
Model	CA/LINE-10
Specific energy consumption (SEC) average climate (kWh/(m ² .yr))	-23.7
Specific energy consumption (SEC) cold climate (kWh/(m ² .yr))	-50.8
Specific energy consumption (SEC) warm climate (kWh/(m ² .yr))	-8.2
SEC class	C
Typology	RVU / UVU
Drive type	Multi-speed
HRS type	None
Maximum flow rate (m ³ /h)	210
Electric power input of the fan drive at maximum flow rate (W)	41
Sound power level (LWA) (dBA)	61
Reference flow rate (m ³ /s)	0.041
Reference pressure difference (Pa)	208
SPI (W/m ³ /h)	0.280
Control factor	0.65

Control typology	Local demand control
Declared max. internal leakage rate (%)	2.0%
Max. external leakage rate (%)	3.2%
Position and description of visual filter warning	Not applicable
Instructions to install regulated grilles	See manual
Website	www.sodeca.com
Annual electricity consumption (AEC) average climate (kWh/yr)	200
Annual electricity consumption (AEC) warm climate (kWh/yr)	200
Annual electricity consumption (AEC) cold climate (kWh/yr)	200
Annual heating saved (AHS) average climate (kWh/yr)	2800
Annual heating saved (AHS) warm climate (kWh/yr)	1300
Annual heating saved (AHS) cold climate (kWh/yr)	5500
ErP compliance	2018

MOTOR DATA

Max. Electrical Power (kW)	0.05
Hz/phases	50/1
Motor (rpm)	2700
Max. current (A) 220-240 V	0.2
Motor protection	IP44

Data can change, please check motor plate

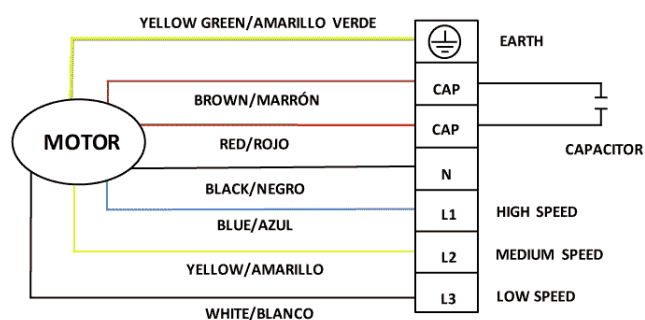

DIMENSIONS

A	B	ød	øD	E	F	øK	C
209	279	98	245	296	130	4	47

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

Approx. weight (kg)	3.6
---------------------	-----

