

NEOLINEO-125/V

Code: 1034783



In-line fans for small ducts with removable covers and small size with long life ball bearings

Fan:

- Casing made of self-extinguishing V0 plastic material.
- External terminal box with variable position.
- Quick and easy to install.
- T models are equipped with a timer.

Motor:


- Motors with long life ball bearings. IPX4 protection. Two-speed and adjustable.
- Single-phase 220-240 V 50/60 Hz.
- Working temperature: -10 °C +60 °C.

Finish:

- In white plastic material, self-extinguishing V0 fire.



CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M³

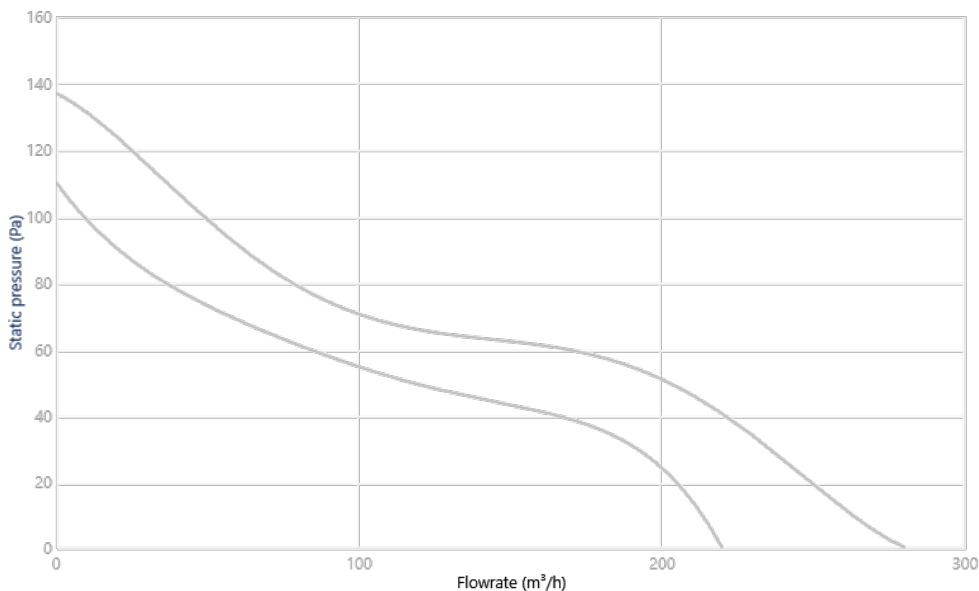


Design Point

Q (m³/h)	
Ps (Pa)	

Service Point (SP)

Q (m³/h)	-/-
Ps (Pa)	-/-
Pd (Pa)	-/-
Pt (Pa)	-/-

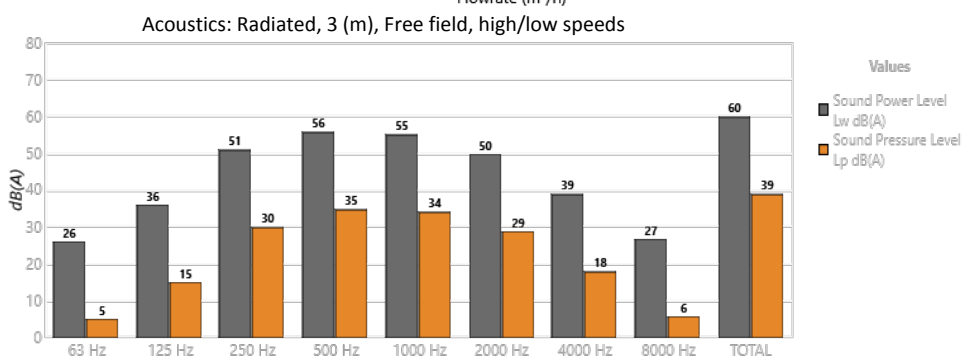

Band	Lw dB(A)	Lp dB(A)
63 Hz	26	5
125 Hz	36	15
250 Hz	51	30
500 Hz	56	35
1000 Hz	55	34
2000 Hz	50	29
4000 Hz	39	18
8000 Hz	27	6
TOTAL	60	39

TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	280/220
Speed (rpm)	2500
Maximum static pressure (Pa)	136.9
Maximum total pressure (Pa)	136.9

ERP

Remarks	ErP Exclude. Pe < 125 W
---------	-------------------------

MOTOR DATA

Max. Electrical Power (kW)	0.04
Hz/phases	50/1
Motor (rpm)	2500
Max. current (A) 220-240 V	0.26
Motor protection	IPX4

Data can change, please check motor plate

DIMENSIONS

A	B	C	ØD
246	126	190	123

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

Approx. weight (kg)	1.4
---------------------	-----

