

NEOLINEO-200/V

Code: 1034786



In-line fans for small ducts with removable covers and small size with long life ball bearings

Fan:

- Casing made of self-extinguishing V0 plastic material.
- External terminal box with variable position.
- Quick and easy to install.
- T models are equipped with a timer.

Motor:


- Motors with long life ball bearings. IPX4 protection. Two-speed and adjustable.
- Single-phase 220-240 V 50/60 Hz.
- Working temperature: -10 °C +60 °C.

Finish:

- In white plastic material, self-extinguishing V0 fire.



CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M³

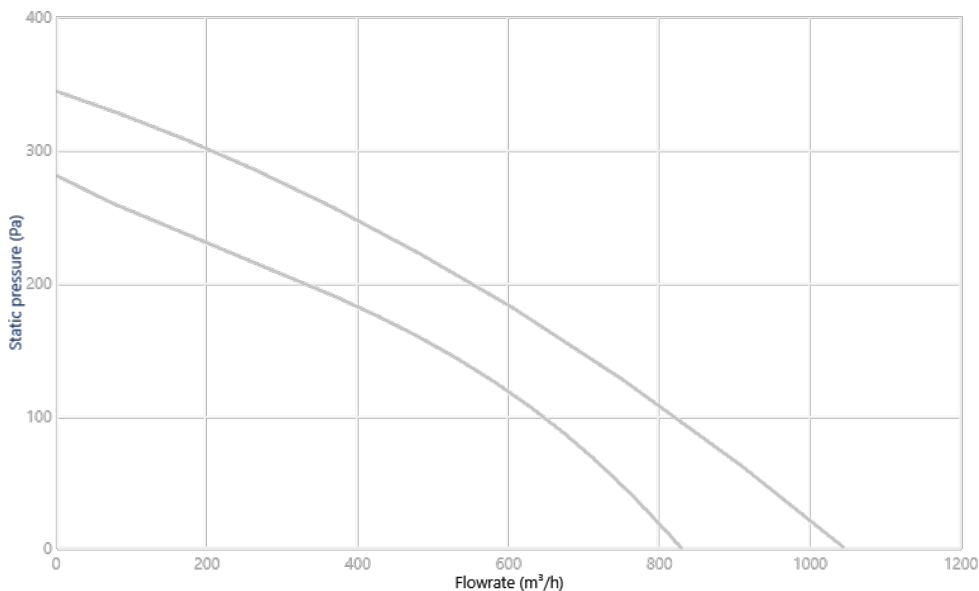


Design Point

Q (m³/h)	
Ps (Pa)	

Service Point (SP)

Q (m³/h)	-/-
Ps (Pa)	-/-
Pd (Pa)	-/-
Pt (Pa)	-/-

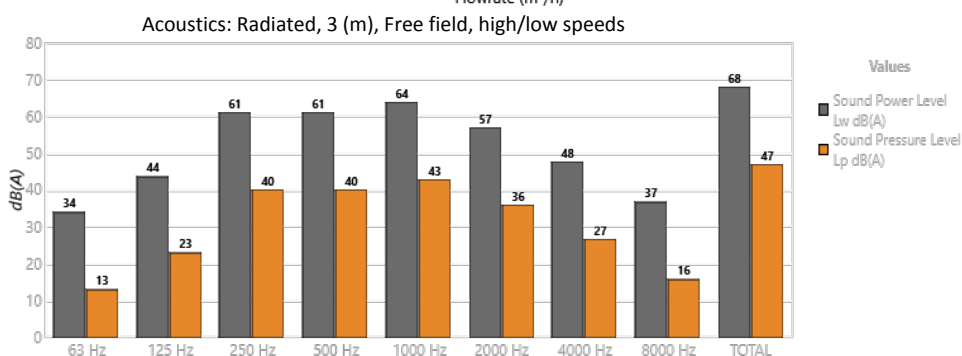

Band	Lw dB(A)	Lp dB(A)
63 Hz	34	13
125 Hz	44	23
250 Hz	61	40
500 Hz	61	40
1000 Hz	64	43
2000 Hz	57	36
4000 Hz	48	27
8000 Hz	37	16
TOTAL	68	47

TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	1045/830
Speed (rpm)	2510
Maximum static pressure (Pa)	343.8
Maximum total pressure (Pa)	343.8

ERP

Remarks	ErP Exclude. Pe < 125 W
---------	-------------------------

MOTOR DATA

Max. Electrical Power (kW)	0.13
Hz/phases	50/1
Motor (rpm)	2510
Max. current (A) 220-240 V	0.55
Motor protection	IPX4

Data can change, please check motor plate

DIMENSIONS

A	B	C	ØD
296	209	261	197

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

Approx. weight (kg)	4
---------------------	---

