



CJBD-3333-6T 1 1/2

Code: 1009291



Magnelis sheet steel ventilation units with maximum corrosion resistance according to ISO 12944

Fan:

- CBD series double inlet fans.
- Category C5 anti-corrosive Magnelis sheet steel structure with thermal and acoustic insulation.
- Forward curved impeller in galvanised sheet steel.
- Glands for cable entry.

Motor:

- Enclosed motors with built-in thermal protector, class F, with ball bearings, IP54 protection.
- Single-phase 220-240 V 50 Hz and three-phase 220-240/380-415 V 50 Hz.
- Working temperature: -25 °C +60 °C.

Finish:


- Magnelis steel sheet.

On request:

- With circular outlet.



CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M³

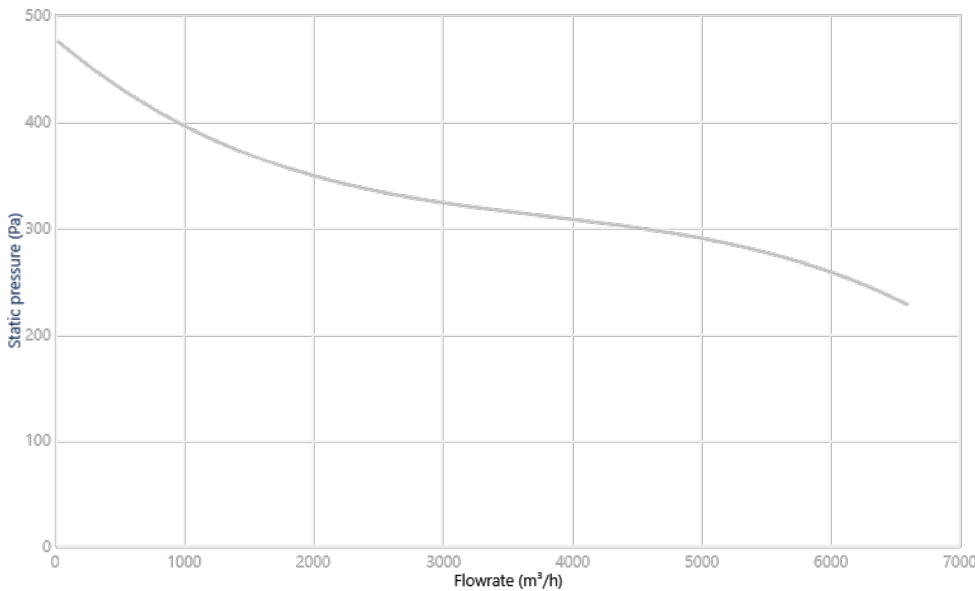

Design Point


Q (m³/h)	
Ps (Pa)	

Service Point (SP)

Q (m³/h)	-
Ps (Pa)	-
Pd (Pa)	-
Pt (Pa)	-

Acoustics: Radiated, 3 (m), Free field

The values given are obtained under laboratory conditions according to ISO 3744.

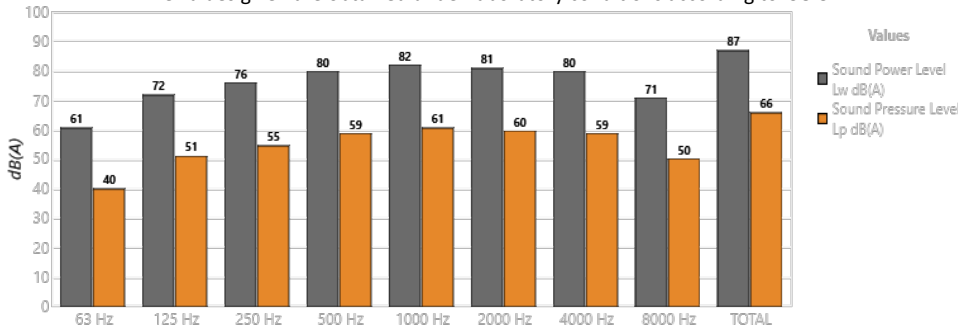

Band	Lw dB(A)	Lp dB(A)
63 Hz	61	40
125 Hz	72	51
250 Hz	76	55
500 Hz	80	59
1000 Hz	82	61
2000 Hz	81	60
4000 Hz	80	59
8000 Hz	71	50
TOTAL	87	66

TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	6600
Speed (rpm)	850
Maximum static pressure (Pa)	475
Maximum total pressure (Pa)	475






ERP

Brand	SODECA, S.L.U.	Static efficiency of fan according to EU 327/2011 (%)	42.9%
Model	CJBD-3333-6T 1 1/2	Max. internal leakage rate (%)	2.3%
Typology	NRVU / UVU	Filter energy performance	Not applicable
Drive type	Variable speed	Visual filter warning	Not applicable
HRS type	None	Sound power level (LWA) (dBA)	85
Nominal flow rate (m³/s)	1.423	Website	www.sodeca.com
Effective electric power input (kW)	0.997	ErP compliance	2018
SFPint (W/m³/s)	230.00		
Face velocity at design flow rate (m/s)	10.78		
Nominal external pressure (Pa)	294		

MOTOR DATA

Rated Mechanical Power (kW)	1.1	Max. current (A) 380-415 V	3.8
Hz/phases	50/3	Max. current (A) 220-240 V	6.6
Motor (rpm)	850	Motor frame size	90
Poles	6P		

Data can change, please check motor plate

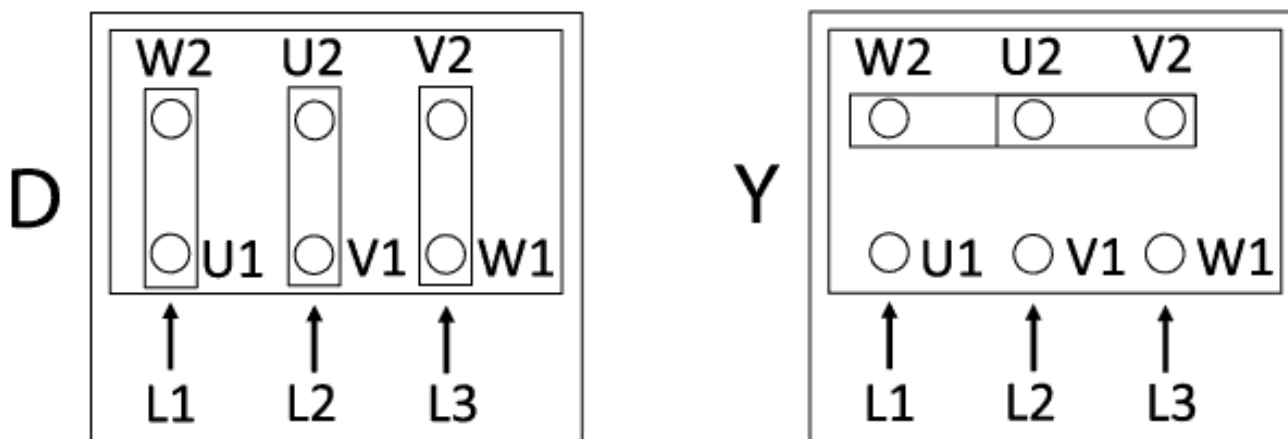

DIMENSIONS

A	B	C	D	E	F	G	L	K
650	650	700	554	604	105	198	347	392

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

Approx. weight (kg)	48
---------------------	----

