

CBD-3333-6M 3/4/HE

Code: 1009171



Double inlet centrifugal fans with direct drive motors and forward curved impeller

Fan:

- Galvanised steel sheet casing.
- Forward curved impeller in galvanised sheet steel.
- Supplied with PSB support feet.

Motor:


- High efficiency (HE) motors in compliance with ErP 2015.
- Enclosed motors with built-in thermal protector, class F, with ball bearings, IP54 protection.
- Single-phase 220-240 V 50 Hz and three-phase 220-240/380-415 V 50 Hz.
- Working temperature: -25 °C +60 °C.

Finish:

- Galvanised steel sheet.



CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M³

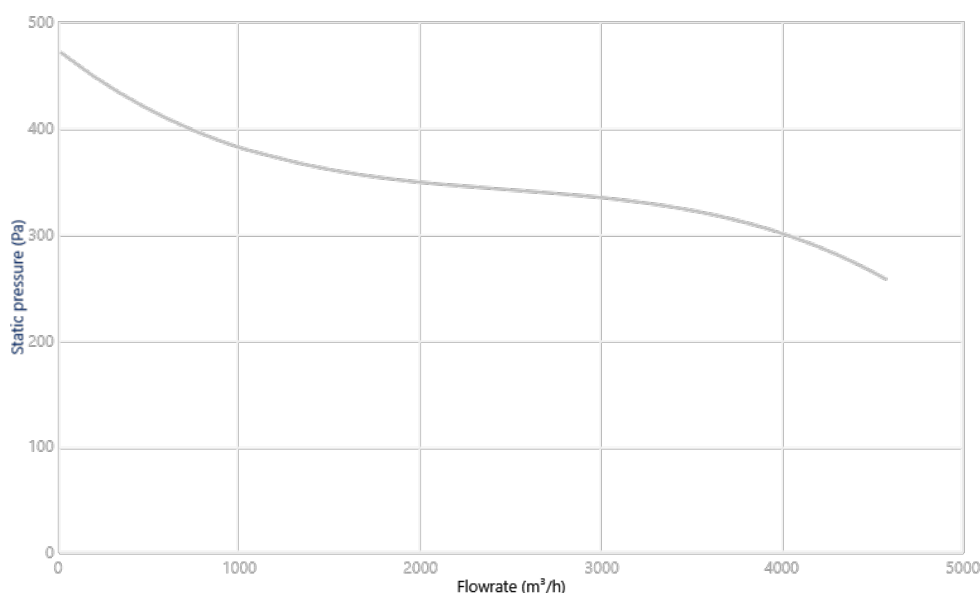


Design Point

Q (m³/h)	
Ps (Pa)	

Service Point (SP)

Q (m³/h)	-
Ps (Pa)	-
Pd (Pa)	-
Pt (Pa)	-

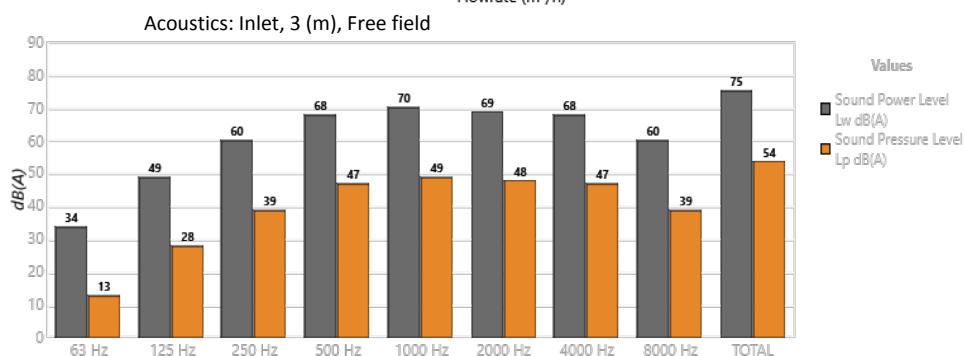

Band	Lw dB(A)	Lp dB(A)
63 Hz	34	13
125 Hz	49	28
250 Hz	60	39
500 Hz	68	47
1000 Hz	70	49
2000 Hz	69	48
4000 Hz	68	47
8000 Hz	60	39
TOTAL	75	54

TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	4580
Speed (rpm)	850
Maximum static pressure (Pa)	471.1
Maximum total pressure (Pa)	471.1

ERP

Efficiency	40.4%
Efficiency grade N	47.7
Measurement category	A
Efficiency category	Static
Specific ratio	1.00
Flowrate (m³/h)	3057


Pressure (Pa)	332
Input power (kW)	0.699
Speed (rpm)	932
Variable speed drive	VSD not necessary
ErP compliance	2015

♦ Data established at point of optimum efficiency

MOTOR DATA

Rated Mechanical Power (kW)	0.55
Hz/phases	50/1
Motor (rpm)	850
Poles	6P
Max. current (A) 220-240 V	4.3
Motor frame size	90

Data can change, please check motor plate

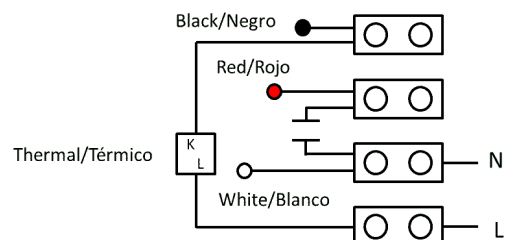

DIMENSIONS

A	B1	B2	E	E1	H	K	L	UxS	V	X	Z1	Z
493	526	290	230	82	236	387	345	9x16	390	415	70	457

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

Approx. weight (kg)	23
---------------------	----

