

CJTX-C-10/10-1.5-F-400 IE3

Code: 1028023



400 °C/2h belt driven double inlet extractor fan units

400 °C/2h extractor fan units, with motor and transmission mounted inside the box, to operate outside the fire risk zone.



Fan:

- Galvanised sheet steel structure.
- Forward curved impeller in galvanised sheet steel.
- Approved in accordance with standard EN 12101-3, with certificate no.: 0370-CPR-0468.
- Linear airflow direction.

Motor:

- Class F motors with ball bearings, IP55 protection and with 1 or 2 speeds, depending on model.
- Motors with IE3 efficiency for powers equal to or greater than 0.75 kW, except single-phase, 2-speed and 8-pole.
- Three-phase 230/400 V 50 Hz (up to 4 kW) and 400/690 V 50 Hz (powers greater than 4 kW).
- Maximum temperature of air to be carried: S1 continuous operation -25 °C +120 °C. S2 operation, 300 °C/2h and 400 °C/2h.


Finish:

- Galvanised steel sheet.

On request:

- Fans with vertical outlet.
- ATEX certification.

CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M³

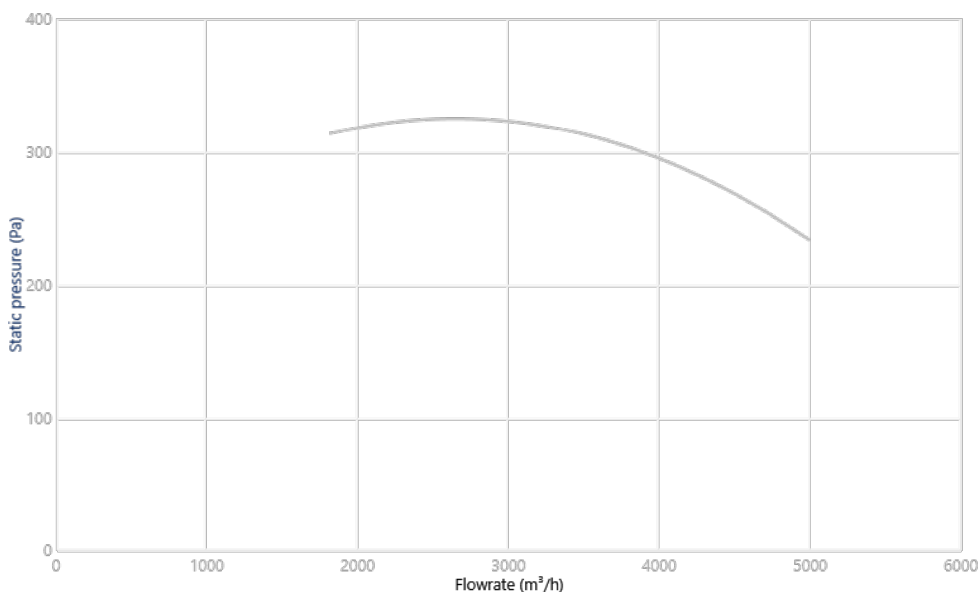


Design Point

Q (m³/h)	
Ps (Pa)	

Service Point (SP)

Q (m³/h)	-
Ps (Pa)	-
Pd (Pa)	-
Pt (Pa)	-

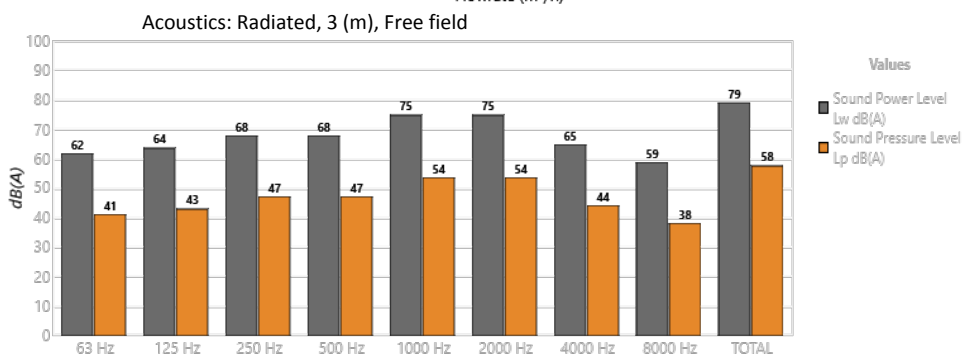

Band	Lw dB(A)	Lp dB(A)
63 Hz	62	41
125 Hz	64	43
250 Hz	68	47
500 Hz	68	47
1000 Hz	75	54
2000 Hz	75	54
4000 Hz	65	44
8000 Hz	59	38
TOTAL	79	58

TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	5000
Speed (rpm)	1130
Maximum static pressure (Pa)	324.6
Maximum total pressure (Pa)	371

ERP


Brand	SODECA, S.L.U.
Model	CJTX-C-10/10-1.5-F-400 IE3
Typology	NRVU / UVU
Drive type	Variable speed
HRS type	None
Nominal flow rate (m³/s)	0.891
Effective electric power input (kW)	0.713
Face velocity at design flow rate (m/s)	9.00
Nominal external pressure (Pa)	319

Static efficiency of fan according to EU 327/2011 (%)	45.2%
Max. external leakage rate (%)	0.2%
Filter energy performance	Not applicable
Visual filter warning	Not applicable
Sound power level (LWA) (dBA)	78
Website	www.sodeca.com
ErP compliance	2018


MOTOR DATA

Rated Mechanical Power (kW)	1.1
Hz/phases	50/3
Motor (rpm)	1455
Poles	4P
Max. current (A) 380-415 V Y	2.34
Max. current (A) 220-240 V D	4.07
Motor protection	IP55
Motor frame size	90S/L

Data can change, please check motor plate

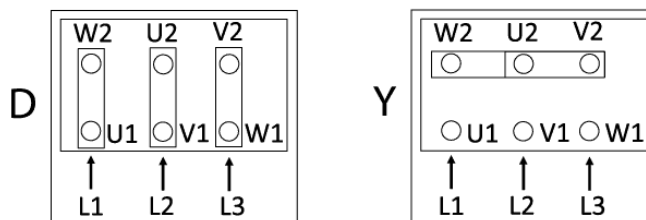

FAN POSITIONS



LG90: Standard orientation

DIMENSIONS

A	B	B1	C	D	E	F	G	H	I	K	L	X	Z
860	618	-	825	479	504	87	235	884	787	334	296	12	9

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

Approx. weight (kg)	96
---------------------	----

