

MSZ-LN18/25/35/50/60VG2



GOOD DESIGN AWARD 2016
BEST 100


MSZ-LN SERIES

Developed to complement modern interior room décor, the LN Series is available in four colours specially chosen to blend in naturally wherever installed. Not only the sophisticated design, but also the optimum energy efficiency and operational comfort add even more value to this series.



Luminous and Luxurious Design

Natural White, Pearl White, Ruby Red, and Onyx Black. LN Series indoor units are available in four colours to match various lifestyles. The appearance of the indoor unit differs depending on the lighting in the room, attracting the attention of everyone that enters the room.

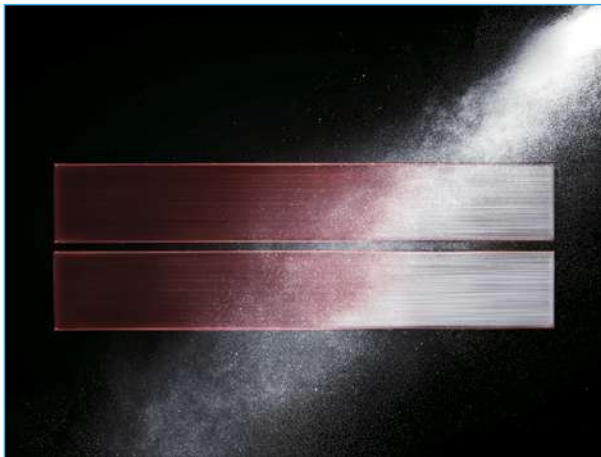

Master craftsmanship painting technology has resulted in a refined design, giving the finish deep colour and a premium quality feel.



Pearl White blends in with any interior.



Ruby Red gives an accent to the room, affording timeless elegance to sophisticated interiors.



Onyx Black matches darker interiors, creating a comfortable environment.

LED Backlight Remote Controller

Not only the indoor units, but also the wireless remote controllers come in four colours as well. Each remote controller matches the indoor unit. Even the textures are the same.

The setting can be easily checked in the dark thanks to LED backlight.



Pearl White



Ruby Red



Onyx Black




Natural White

High Energy Efficiency




Optimum cooling/heating performance is another feature for the LN series. Models from capacities 25 to 50 have achieved the "Rank A+++" for SEER, and models for capacities 25 and 35 have achieved the "Rank A+++" for SCOP as well.

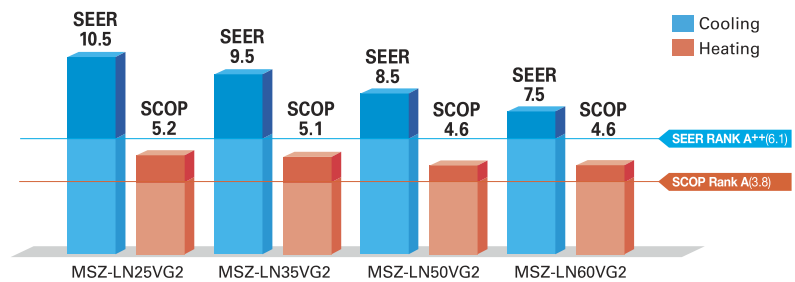


3D i-see Sensor

The LN Series is equipped with 3D i-see Sensor, an infrared-ray sensor that measures the temperature at distant positions. While moving to the left and right, eight vertically arranged sensor elements analyze the room temperature in three dimensions. This detailed analysis makes it possible to judge where people are in the room, thus allowing creation of features such as "Indirect airflow," to avoid airflow hitting people directly, and "direct airflow" to deliver airflow to where people are.

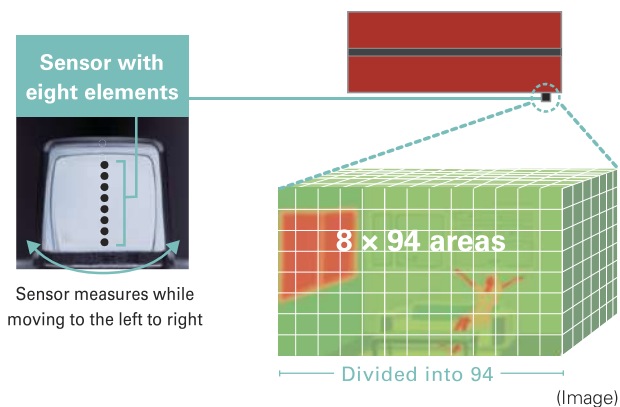

No occupancy energy-saving mode


The sensors detect whether there are people in the room. When no-one is in the room, the unit automatically switches to energy-saving mode.

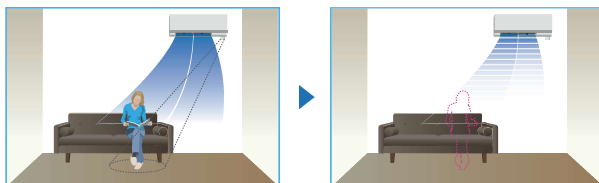

The "3D i-see Sensor" detects people's absence and the power consumption is automatically reduced approximately 10% after 10 minutes and 20% after 60 minutes.


Indirect Airflow

The indirect airflow setting can be used when the flow of air feels too strong or direct. For example, it can be used during cooling to avert airflow and prevent body temperature from becoming excessively cooled.




Direct Airflow

This setting can be used to directly target airflow at people such as for immediate comfort when coming indoors on a hot (cold) day.




Even Airflow *LN Series only

Normal swing mode



The airflow is distributed equally throughout the room, even to spaces where there is no human movement.



Even airflow mode



The 3D i-see sensor memorizes human movement and furniture positions, and efficiently distributes airflow.

No occupancy Auto-OFF mode *LN Series only

The sensors detect whether or not there are people in the room. When there is no one in the room, the unit turns off automatically.




Circulator Operation


(MSZ-LN18/25/35/50/60VG-SC Scandinavian model)

In case the indoor temperature reaches the setting temperature, the outdoor unit stops and the indoor unit starts FAN operation to circulate the indoor air.

The outdoor unit starts operation automatically when the indoor temperature drops below the setting temperature.



If the heating operation is continued, the warm air is formed around ceiling.



This operation can help to circulate and rene warm air.

Plasma Quad Plus

Plasma Quad Plus is a plasma-based filter system that effectively removes six kinds of air pollutants. Plasma Quad Plus captures mold and allergens more effectively than Plasma Quad. It can also capture PM2.5 and particles smaller than 2.5µm, creating healthy living spaces for all.


Bacteria



Test results have confirmed that Plasma Quad Plus neutralizes 99% of bacteria in 162 minutes in a 25m³ test space.

<Test No.> KRCS-Bio. Test Report No. 2016-0118

Viruses



Test results have confirmed that Plasma Quad Plus neutralizes 99% of virus particles in 72 minutes in a 25m³ test space.

<Test No.> vrc.center, SMC No. 28-002

Molds



Test results have confirmed that Plasma Quad Plus neutralizes 99% of mold in 135 minutes in a 25m³ test space.

<Test No.> Japan Food Research Laboratories Test Report No. 16069353001-0201

Allergens



In a test, air containing cat fur and pollen was passed through the air cleaning device at the low airflow setting. Before and after measurements confirm that Plasma Quad Plus neutralizes 98% of cat fur and pollen.

<Test No.> ITEA Report No. T1606028

PM2.5



Test results have confirmed that Plasma Quad Plus removes 99% of PM2.5 in 145 minutes in a 28m³ test space.

<In-company investigation>

Dust



Test results have confirmed that Plasma Quad Plus removes 99.7% of dust and mites.

<Test No.> ITEA Report No. T1606028


Model	Name	Method	Bacteria	Viruses	Molds	Allergens	Dust	PM2.5*
FH Series	Plasma Quad	One-Stage Plasma	A	A	B	B	C	
LN Series	Plasma Quad Plus	Two-Stage Plasma	A	A	A	A	A	A

A: Highly effective
B: Effective
C: Partially effective


*PM2.5:
Particles smaller than 2.5µm



Image of Plasma Quad Plus

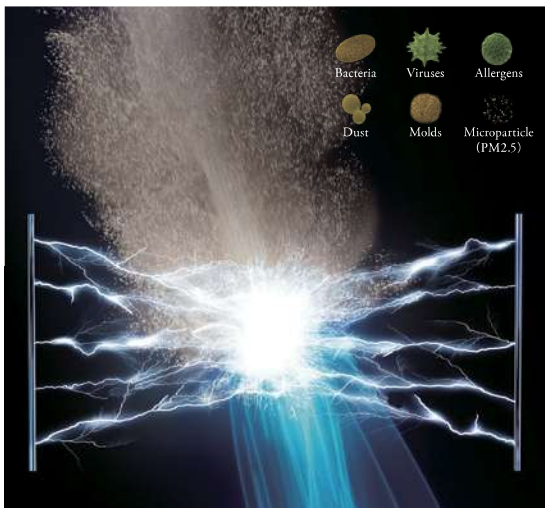

Principle of Plasma Quad Plus

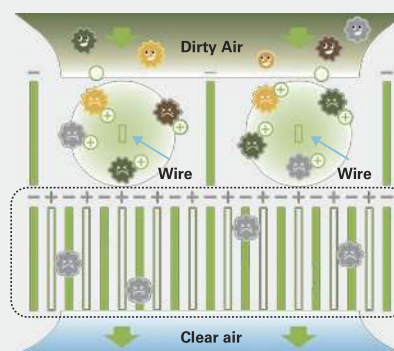

Dust, PM2.5
Viruses Bacteria
Mold Allergens

1st stage

- Make plasma.
- Break mold and allergens. Inhibit viruses.
- Dust and PM2.5 given an electrical charge (+).

2nd stage

- Make a strong electrical field.
- The charged dust and PM2.5 (+) are absorbed in the strong electrical field (-).



Dual Barrier Coating

A two-barrier coating prevents dust and greasy dirt from getting into the air conditioner.

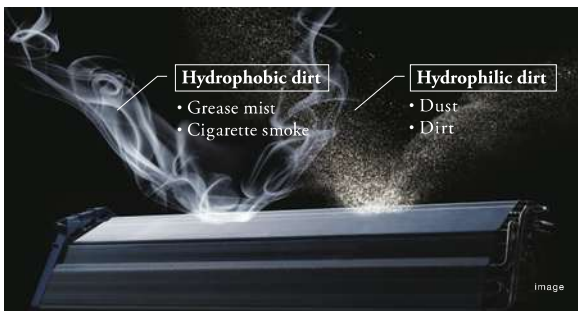


*Image is for illustration purposes.




State-of-the-art Coating Technology


Dirt is generally classified into two groups: hydrophilic dirt such as fiber dust and sand dust, and hydrophobic dirt such as oil and cigarette smoke. Mitsubishi Electric's dual barrier coating works as a two-barrier coating that prevent hydrophilic dirt penetration and "hydrophilic particles" that prevent hydrophobic dirt from getting into the air conditioner. This dual coating on the inner surface keeps the air conditioner clean year-round.



Comparison of dirt on heat exchanger, fan and air duct (in-house comparison)

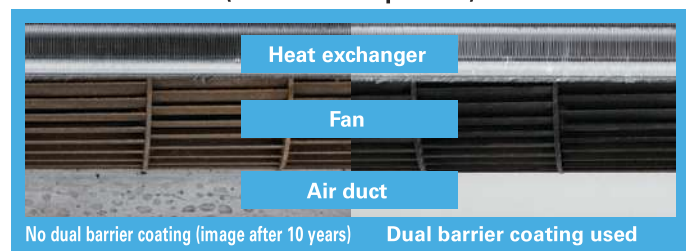

The inside of the indoor unit gets dirty after many years of usage.

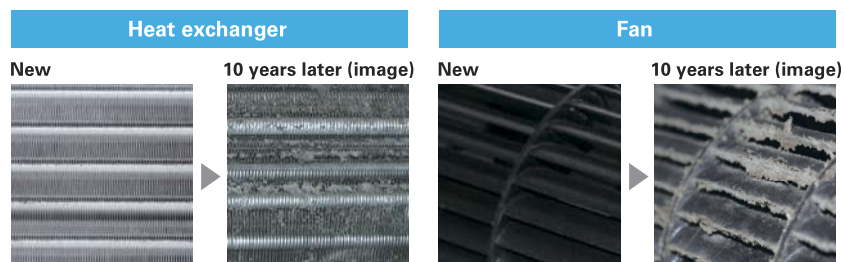

Consequences when the inside of the indoor unit is left dirty

- Deterioration in energy efficiency
- Musty smell from the unit

*1 Verified by SIAA test method (JIS Z 2911) with No. JP0501014A0002O on SIAA antifungal agent positive list. Antifungal effect depends on the working environment. Fungicides comply with the SIAA safety criteria.
What is SIAA? https://www.kohkin.net/en_index/en_siaa.html

Double Flap

The vanes create various airflows to make each person in the room comfortable. Not only the horizontal vanes, but also the vertical vanes move independently, eliminating hot spots or cold spots throughout the room.




Night Mode

When Night Mode is activated using the wireless remote controller, air conditioner operation will switch to the following settings.

- The brightness of the operation indicator lamp will become dimmer.
- The beeping sound will be disabled.
- The outdoor operating noise will drop to 3dB lower than the rated operating noise specification.


*The cooling/heating capacity may drop.

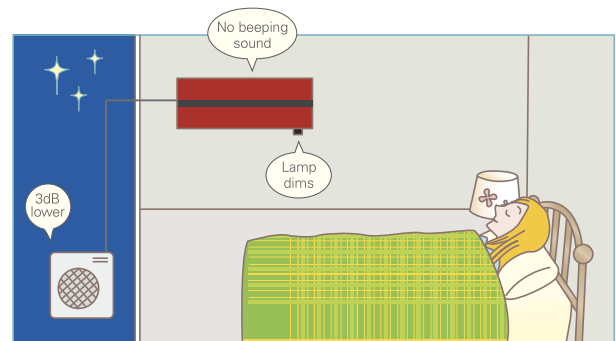

10°C Heating


During heating operation, the temperature can be set in 1°C increments down to 10°C.

This function can also be used with the Weekly Timer setting.

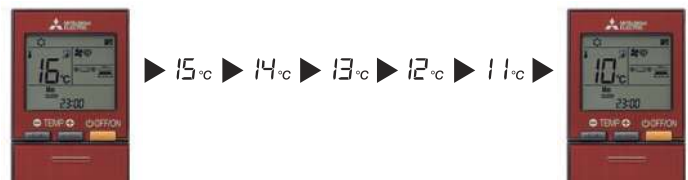

Quiet Operation

The indoor unit noise level is as low as 19dB for LN25/35 models, offering a peaceful inside environment.

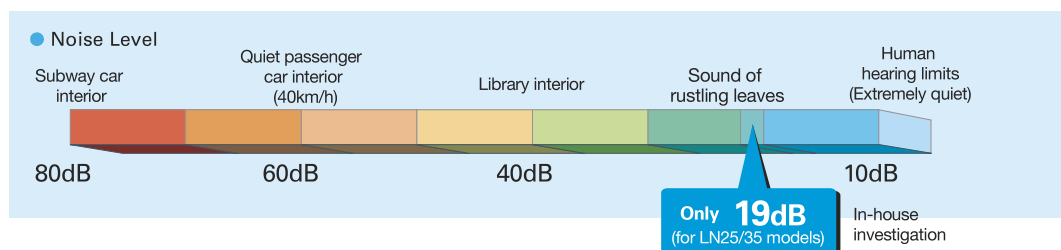

Built-in Wi-Fi Interface

The indoor unit is equipped with a Wi-Fi Interface inside an exclusive pocket in the unit.

This eliminates the need to install a Wi-Fi interface, and also contributes to the beautiful appearance since the interface is hidden.




LN VGHZ SERIES

R32 Single / MXZ, PUMY
R410A PUMY

Unlike conventional air conditioning systems, the LN Series don't lose heating capacity when it's cold outside. Original technologies ensure excellent heating performance under extremely low outdoor temperatures and an impressive guaranteed operating range.




MSZ-LN25/35/50VG2(W)(V)(R)(B)

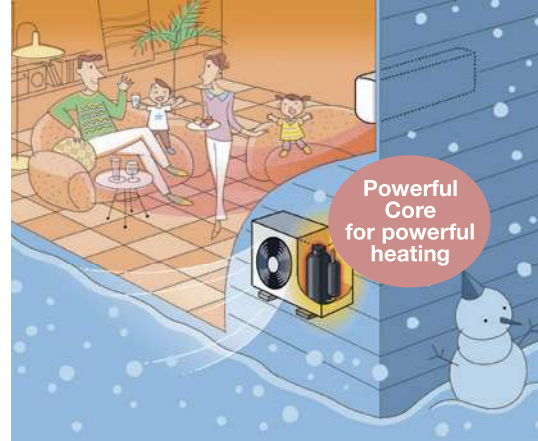


Unparalleled Heating Performance


LN Series outdoor units are equipped with a high-output compressor that provides enhanced heating performance under low outdoor temperatures. The heating operation range is extended down to -25°C.

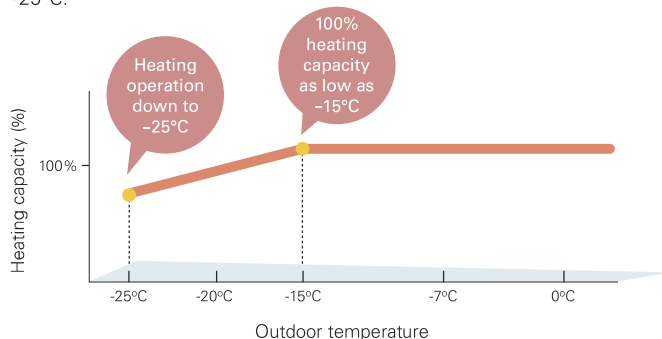

Operating Range

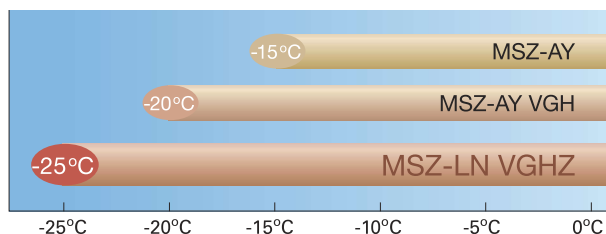


Declared Capacity (at reference design temperature)

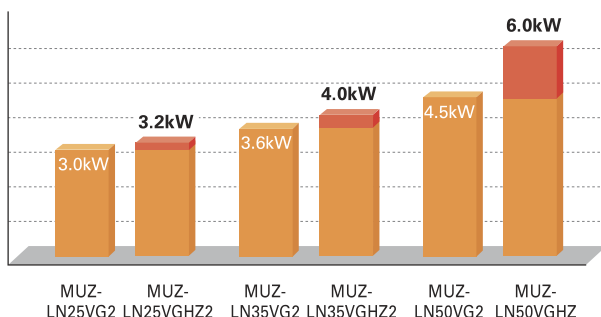

High Energy Efficiency – Energy Rank of A+ or Higher for All Models

DC Inverter

With indoor units that combine functionality, design and capacity and outdoor units equipped with a high-efficiency compressor, the MUZ-LN VGHZ simultaneously achieves high heating capacity and energy-saving performance.

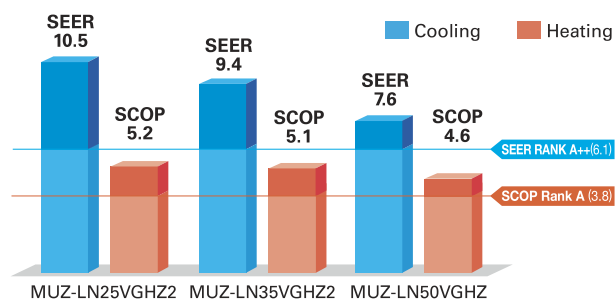

Freeze-prevention Heater Equipped as Standard

The Freeze-prevention heater restricts lowered capacity and operation shutdowns caused by the drain water freezing. This supports stable operation in low-temperature environments.

Can operate at Outdoor temperature of -25°C



Without Freeze-prevention heater




With Freeze-prevention heater

* Image is for illustration purposes. The actual performance depends on outdoor temperature.


Compact, Powerful Compressor

A special manufacturing technology, "Heat Caulking Fixing Method," has been introduced to reduce compressor size while maintaining a high compressor output. This technology enables the installation of a powerful compressor in compact MUZ outdoor units. As a result, excellent heating performance is achieved when operating in cold outdoor environments.

Compressor fixed using conventional method (Arc spot-welded method)

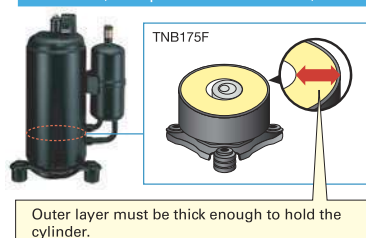

Compressor fixed using Heat Caulking Fixing Method

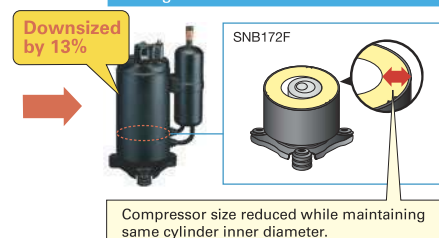

MSZ-LN SERIES



Indoor Unit / Remote Controller

PUMPY
R32 R410A



GOOD DESIGN AWARD 2016
BEST 100

<Pearl White>



MSZ-LN18/25/35/50/60VG2V

<Ruby Red>



MSZ-LN18/25/35/50/60VG2R

<Natural White>



MSZ-LN18/25/35/50/60VG2W

<Onyx Black>



MSZ-LN18/25/35/50/60VG2B

Outdoor Unit

R32



MUZ-LN25/35VG2



MUZ-LN50VG2



MUZ-LN60VG2



Type			Inverter Heat Pump			
Indoor Unit		MSZ-LN18VG2	MSZ-LN25VG2	MSZ-LN35VG2	MSZ-LN50VG2	MSZ-LN60VG2
Outdoor Unit		for MXZ connection	MUZ-LN25VG2	MUZ-LN35VG2	MUZ-LN50VG2	MUZ-LN60VG2
Refrigerant		Single: R32 ⁽¹⁾ / Multi: R410A or R32 ⁽¹⁾				
Power Supply	Source	Outdoor Power Supply				
	Outdoor (V / Phase / Hz)	230 / Single / 50				
Cooling	Design load	kW	—	2.5	3.5	5.0
	Annual electricity consumption ⁽²⁾	kWh/a	—	83	129	205
	SEER ⁽⁴⁾		—	10.5	9.5	8.5
	Energy efficiency class		—	A+++	A+++	A+++
	Capacity					
Heating (Average Season) ⁽⁵⁾	Rated	kW	—	2.5	3.5	5.0
	Min-Max	kW	—	1.0 - 3.5	0.8 - 4.0	1.0 - 6.0
	Total Input	Rated	kW	—	0.485	0.820
	Design load	kW	—	3.0 (-10°C)	3.6 (-10°C)	4.5 (-10°C)
	Declared Capacity	at reference design temperature	kW	—	3.0 (-10°C)	3.6 (-10°C)
		at bivalent temperature	kW	—	3.0 (-10°C)	3.6 (-10°C)
		at operation limit temperature	kW	—	2.5 (-15°C)	3.2 (-15°C)
	Back up heating capacity	kW	—	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
	Annual electricity consumption ⁽²⁾	kWh/a	—	807	987	1369
	SCOP ⁽⁴⁾		—	5.2	5.1	4.6
	Energy efficiency class		—	A+++	A+++	A+++
	Capacity					
	Rated	kW	—	3.2	4.0	6.0
	Min-Max	kW	—	0.7 - 5.4	0.9 - 6.3	1.0 - 8.2
	Total Input	Rated	kW	—	0.600	0.820
Indoor Unit	Operating Current (Max)	A	—	7.1	9.9	13.9
	Input	Rated	kW	0.027	0.027	0.034
	Operating Current(Max)	A	—	0.3	0.3	0.4
	Dimensions	H*W*D	mm	307-890-233	307-890-233	307-890-233
	Weight	kg	14.5 (W) 15.5 (V, R, B)	14.5 (W) 15.5 (V, R, B)	14.5 (W) 15.5 (V, R, B)	15 (W) 16 (V, R, B)
	Air Volume (SLo-Lo-Mid-Hi-SHi ⁽³⁾)	Cooling	m ³ /min	4.7 - 5.9 - 7.1 - 9.2 - 12.4	4.7 - 5.9 - 7.1 - 9.2 - 13.0	5.7 - 7.6 - 8.8 - 10.6 - 13.9
		Heating	m ³ /min	4.5 - 6.6 - 7.5 - 11.0 - 13.9	4.5 - 6.6 - 7.5 - 11.0 - 13.9	5.4 - 6.4 - 8.5 - 10.7 - 15.7
	Sound Level (SPL)	Cooling	dB(A)	19 - 23 - 29 - 36 - 42	19 - 23 - 29 - 36 - 42	27 - 31 - 35 - 39 - 46
	(SLo-Lo-Mid-Hi-SHi ⁽³⁾)	Heating	dB(A)	19 - 24 - 29 - 38 - 45	19 - 24 - 29 - 38 - 45	25 - 29 - 34 - 39 - 47
	Sound Level (PWL)	Cooling	dB(A)	58	58	59
		Heating	dB(A)	58	58	59
	Dimensions	H*W*D	mm	—	550-800-285	550-800-285
	Weight	kg	—	33	34	40
	Air Volume	Cooling	m ³ /min	—	34.3	40.0
		Heating	m ³ /min	—	32.7	40.5
Outdoor Unit	Sound Level (SPL)	Cooling	dB(A)	—	46	49
		Heating	dB(A)	—	49	50
	Sound Level (PWL)	Cooling	dB(A)	—	60	61
		Heating	dB(A)	—	61	64
	Operating Current (Max)	A	—	6.8	9.6	13.5
Ext. Piping	Breaker Size	A	—	10	10	16
	Diameter	Liquid/Gas	mm	—	6.35/9.52	6.35/9.52
	Max.Length	Out-In	m	—	20	30
	Max.Height	Out-In	m	—	12	12
	Guaranteed Operating Range (Outdoor)	Cooling	°C	—	-10 ~ +46	-10 ~ +46
		Heating	°C	—	-15 ~ +24	-15 ~ +24

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SHi: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 57-58 for heating (warmer season) specifications.

MSZ-LN VGHZ SERIES



Indoor Unit / Remote Controller



<Pearl White>



MSZ-LN25/35/50VG2V

<Ruby Red>



MSZ-LN25/35/50VG2R

<Natural White>



MSZ-LN25/35/50VG2W

<Onyx Black>



MSZ-LN25/35/50VG2B


Outdoor Unit



MUZ-LN25/35VGHZ2



MUZ-LN50VGHZ2



Type			Inverter Heat Pump			
Indoor Unit			MSZ-LN25VG2(W)(V)(R)(B)	MSZ-LN35VG2(W)(V)(R)(B)	MSZ-LN50VG2(W)(V)(R)(B)	
Outdoor Unit			MUZ-LN25VGHZ2	MUZ-LN35VGHZ2	MUZ-LN50VGHZ2	
Refrigerant			R32 ^{(*)1}			
Power Supply	Source	Outdoor Power supply				
	Outdoor (V/Phase/Hz)	230/Single/50				
Cooling	Design Load	kW	2.5	3.5	5.0	
	Annual Electricity Consumption ^{(*)2}	kWh/a	83	130	230	
	SEER ^{(*)4}		10.5	9.4	7.6	
	Energy Efficiency Class		A+++	A+++	A++	
	Capacity	Rated	kW	2.5	3.5	5.0
		Min - Max	kW	0.8 - 3.5	0.8 - 4.0	1.4 - 5.8
Total Input	Rated	kW	0.485	0.820	1.380	
Heating (Average Season) ^{(*)5}	Design Load	kW	3.2 (−10°C)	4.0 (−10°C)	6.0 (−10°C)	
	Declared Capacity	at reference design temperature	kW	3.2 (−10°C)	4.0 (−10°C)	6.0 (−10°C)
		at bivalent temperature	kW	3.2 (−10°C)	4.0 (−10°C)	6.0 (−10°C)
		at operation limit temperature	kW	2.3 (−25°C)	3.1 (−25°C)	4.7 (−25°C)
	Back Up Heating Capacity	kW	0.0 (−10°C)	0.0 (−10°C)	0.0 (−10°C)	
	Annual Electricity Consumption ^{(*)2}	kWh/a	861	1098	1826	
	SCOP ^{(*)4}		5.2	5.1	4.6	
	Energy Efficiency Class		A+++	A+++	A++	
	Capacity	Rated	kW	3.2	4.0	6.0
Min - Max		kW	0.8 - 6.3	0.9 - 6.6	1.8 - 8.7	
Total Input	Rated	kW	0.600	0.820	1.480	
Operating Current (max)			A	9.9	10.5	
Indoor Unit	Input	Rated	kW	0.027	0.027	
	Operating Current (max)	A	0.3	0.3	0.4	
	Dimensions	H*W*D	mm	307 - 890 - 233	307 - 890 - 233	
	Weight	kg	15.5	15.5	15.5	
	Air Volume (SLo-Lo-Mid-Hi-SHi ^{(*)3})	Cooling	m³/min	4.3 - 5.8 - 7.1 - 8.8 - 11.9	4.3 - 5.8 - 7.1 - 8.8 - 12.8	
		Heating	m³/min	4.0 - 5.7 - 7.1 - 8.5 - 14.4	4.3 - 5.7 - 7.1 - 8.5 - 13.7	
	Sound Level (SPL) (SLo-Lo-Mid-Hi-SHi ^{(*)3})	Cooling	dB(A)	19 - 23 - 29 - 36 - 42	19 - 24 - 29 - 36 - 43	
		Heating	dB(A)	19 - 24 - 29 - 36 - 45	19 - 24 - 29 - 36 - 45	
	Sound Level (PWL)	dB(A)	58	58	60	
	Outdoor Unit	Dimensions	H*W*D	mm	550 - 800 - 285	880 - 840 - 330
Weight		kg	35	36	53	
Air Volume		Cooling	m³/min	31.4	33.8	
		Heating	m³/min	27.4	27.4	
Sound Level (SPL)		Cooling	dB(A)	46	49	
		Heating	dB(A)	49	50	
Sound Level (PWL)		Cooling	dB(A)	60	61	
Operating Current (max)		A	9.6	10.2	14.8	
Breaker Size		A	10	12	16	
Ext. Piping		Diameter	Liquid / Gas	mm	6.35/9.52	6.35/9.52
	Max. Length	Out-In	m	20	30	
	Max. Height	Out-In	m	12	15	
Guaranteed Operating Range [Outdoor]	Cooling	°C	−10 ~ +46	−10 ~ +46		
	Heating	°C	−25 ~ +24	−25 ~ +24		

(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHi: Super High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(*5) Please see page 57-58 for heating (warmer season/colder season) specifications.