



Halogen infrared heater IRCF

For spot heating of large premises

IRCF is especially designed for spot heating of premises with large air volumes, such as churches, aircraft hangars and marquees. With its high efficiency and compact size it is perfect for many difficult applications.


IRCF has a discreet and compact design. Equipped with one to three halogen lamps and with glossy finished reflectors.

- Equipped with one to three halogen lamps and with glossy finished reflectors.
- Easy mounting with mounting bracket on the wall or ceiling. The heater can be angled.
- Protection grille available as an accessory.
- Corrosion proof casing of aluminum.
- Colour: RAL 9006.


Halogen infrared heater IRCF (IP20)

Type	Heat output [W]	Voltage [V]	Dimensions LxHxW [mm]	Number of lamps	Weight [kg]
IRCF1500	1500	230V~	490x230x140	1	1,7
IRCF3000	3000	230V~	490x375x140	2	2,4
IRCF4500	4500	230V~/400V3~	490x515x140	3	3,0


Installation height

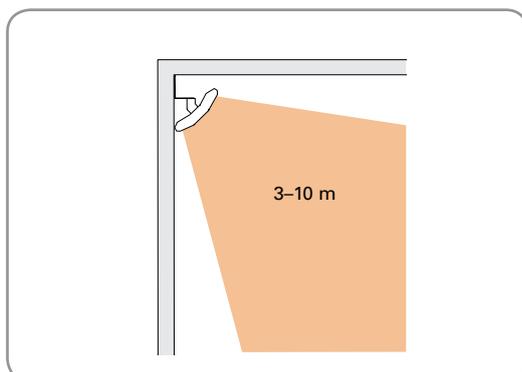

Minimum distances

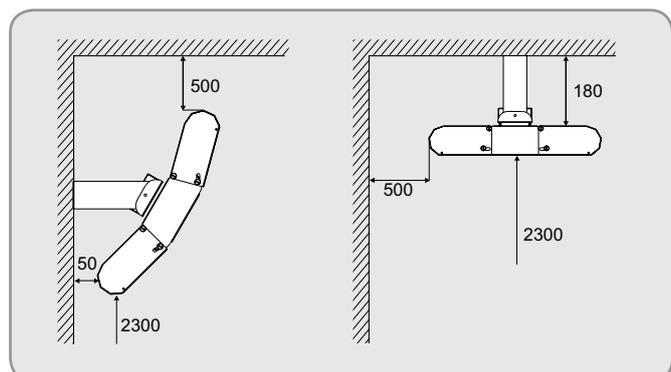

Dimensions

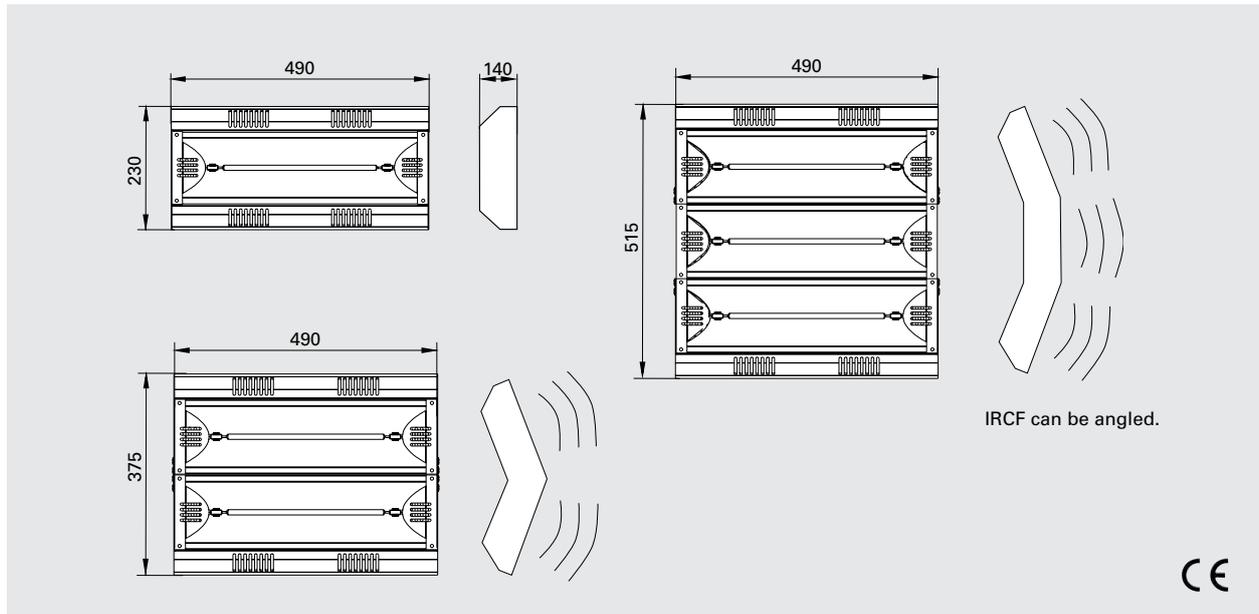

Mounting

IRCF is installed horizontally on the ceiling or on the wall with the supplied bracket. IRCF can be suspended from chains for example. The angle of the heater can be adjusted for optimum comfort. Protection grille is available as an accessory.

Connection

IRCF is intended for permanent installation.

Accessories



Type	Description	HxWxD [mm]
T10S	Electronic thermostat with concealed knob, IP30	80x80x31
TK10S	Electronic thermostat with visible knob, IP30	80x80x31
KRT1900	Capillary room thermostat, IP55	165x57x60
S123	Manual switch for 1-2-3 output steps, IP44	72x64x46
CBT	Timer, IP44	155x87x43
LIRCF	Extra lamp	
IRCG1	Protection grille for IRCF1500. IRCF3000 requires 2 pcs, IRCF4500 requires 3 pcs.	

For further information and options, see the "Controls" section.