



Industrial ceiling fan ICF

Equalizes the temperature in buildings with high ceilings

Ceiling fans are used primarily to equalize the temperature in rooms with high ceilings, such as industrial and warehouse buildings, gymnasiums, and shops. Several controls as well as downrods and blades of different sizes are available, making it possible to adapt ceiling fan ICF to almost all applications.

Ceiling fan ICF pushes the warm air from the ceiling and thus lowers the temperature there, the heat losses through the roof and walls are reduced and in many cases, heating costs can be reduced by up to 30%.

Industrial ceiling fan ICF is of high quality and maintenance free with a long service life. Easy installation and low energy consumption gives a very short pay-off period, in many instances in less than a year.

- The blades push down large volumes of air without causing excessive air speed.
- Can operate clockwise and anti-clockwise.
- Canopy with vibration absorption.
- Fan blades and downrod coated with zinc.
- The enclosed motor is equipped with permanently lubricated ball bearings for long life.
- Other fan blade diameters are available as an accessory (914, 1218 mm).
- Other downrods are available as an accessory (gives a total height of 395, 945 mm).
- High protection class, IP55 (ICF55).
- Colour: NCS S 0505-R90B

Industrial ceiling fan ICF (IP20 / IP55)


Type	Output [W]	Airflow [m³/h]	Voltage [V]	Amperage [A]	Height x Ø [mm]	Weight [kg]
ICF20	70	13500	230V~	0.33	545x1422	6.2
ICF55	70	13500	230V~	0.33	545x1422	6.2

Protection class ICF20: IP20.

Protection class ICF55: IP55.


Approved by IMQ.

Dimensions

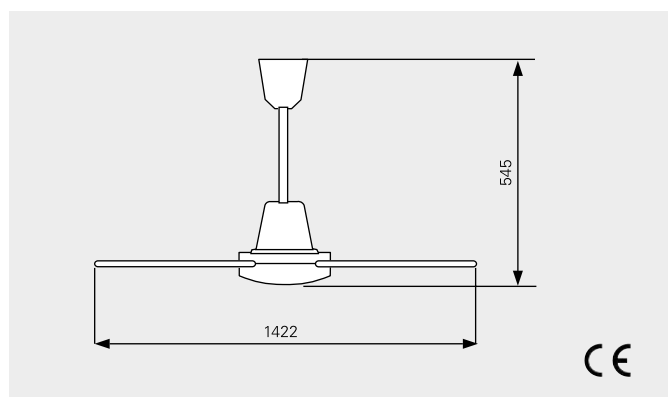

Mounting and connection

The fans are positioned systematically in the room at equal distances between themselves as detailed in the table below. This is to give the best temperature distribution. To adapt the fan to suit each specific room it should be controlled with a fan speed regulator.

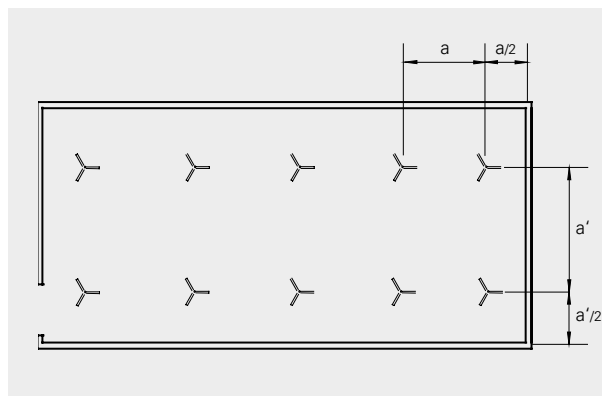

Recommended distance between fans

Ceiling height [m]	4	6	8	10	12
Distance a [m]	5	7	8	9	10


Control options

The fan speed on ceiling fans should be controlled to obtain optimal heat equalization and prevent draughts.

The fan can be reversed for summer operation. CAR15 and CFR1R have this function, with other control options a change-over switch is needed. This switch is connected in a series after the control and a 4x1.5 mm² cable must be used.

- CAR15, automatic fan speed control, reversible
- CFR1R, 5-step control, reversible
- RE1,5 / RE3 / RE5, 5-step control
- PE1 / PE2,5 , variable fan speed control

Accessories

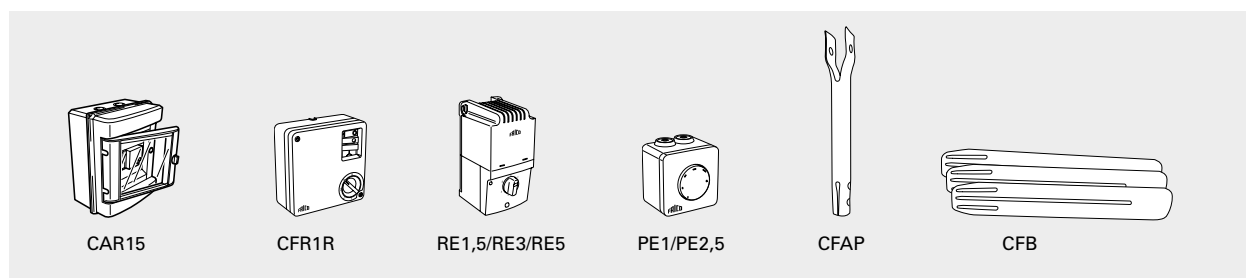

Type	Description	HxWxD [mm]
CAR15	Automatic fan speed control, max. breaking current: 6,3 A	210x210x100
CFR1R	5-step control, max. breaking current: 0,4 A	120x120x60
PE1	Variable fan speed control, external mounting (IP54) or recessed mounting (IP44), max. breaking current: 1 A	82x82x65
PE2,5	Variable fan speed control, external mounting (IP54) or recessed mounting (IP44), max. breaking current: 2,5 A	82x82x65
RE1,5	5-step control, max. breaking current: 1,5 A	200x105x105
RE3	5-step control, max. breaking current: 3 A	200x105x105
RE5	5-step control, max. breaking current: 5 A	200x105x105
CFAP200	Short downrod, total height 395 mm	
CFAP750	Long downrod, total height 945 mm	
CFB900	Fan blades, fan diameter 914 mm	
CFB1200	Fan blades, fan diameter 1218 mm	