



ALAV

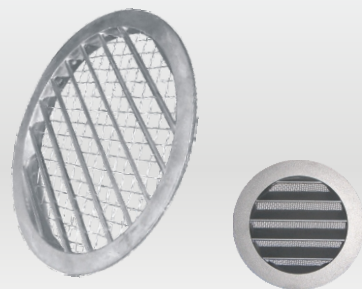


.ALAV: Circular louvers made of moulded aluminium with natural finish
.Application: Louvers for air supply and exhaust in ventilation systems
.Material: Moulded aluminium and Inox mesh
.Colour: Aluminium natural finish
.Composition: Moulded aluminium body with enclined aluminium blades. Equipped with welded insect screen. Can be removed in mechanical ventilation.
Size Ø315 and Ø500 different look
.Mounting: Fitted by nails or by casting




Type	D	A	B	C
ALAV80	80	96.5	4.3	11
ALAV100	100	124	2.8	16.7
ALAV125	125	150.5	2.9	16.3
ALAV150	150	179.5	3.4	13.9
ALAV160	160	180	3.3	14.5
ALAV200	200	223.5	3.4	16.4
ALAV250	250	275	5.2	15.1
ALAV315	315	346	3.9	14
ALAV400	400	439	5	35.3
ALAV500	500	145.2	5.4	33.5

SS-ELA

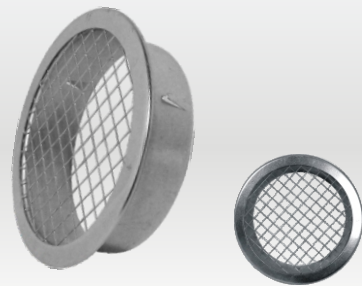


.SS-ELAS: Circular air intake or exhaust louvers made of steel
.Application: For air exhaust or intake in ventilation systems
.Material: steel
.Colour: natural finish
.Composition: Pressed body made of aluminium fish duct connector with clips. Insectscreen fitted behind the face of the louver
.Mounting: To be fitted in ducts or round openings in external wall

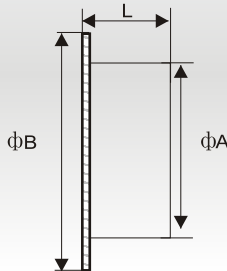


Type	A	B	L
SS-ELAS80	78	106	47
SS-ELAS100	98	126	47
SS-ELAS125	123	151	47
SS-ELAS150	148	176	47
SS-ELAS160	157	187	47
SS-ELAS200	197	226	47
SS-ELAS250	248	276	47
SS-ELAS315	313	343	47

SS-ELAS

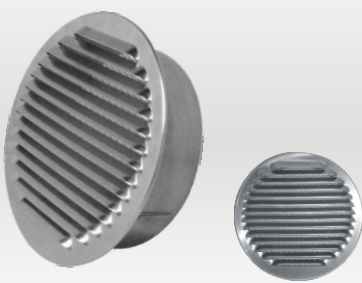


.SS-ELAS: Circular air intake or exhaust louvers made of aluminium with fixed blades
.Application: For air exhaust or intake in ventilation systems
.Material: Aluminium
.Colour: Aluminium natural finish
.Composition: Pressed body made of aluminium fish duct connector with clips. Insectscreen fitted behind the face of the louver
.Mounting: To be fitted in ducts or round openings in external wall

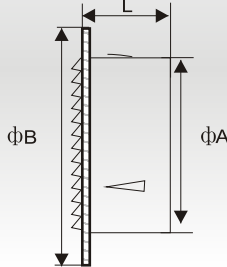

Type	A	B	L
SS-ELAS80	78	106	47
SS-ELAS100	98	126	47
SS-ELAS125	123	151	47
SS-ELAS150	148	176	47
SS-ELAS160	157	187	47
SS-ELAS200	197	226	47
SS-ELAS250	248	276	47
SS-ELAS315	313	343	47

Round Grille

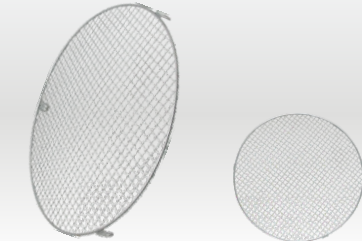


.SS-ELAS: Circular air intake or exhaust louvers made of steel
.Application: For air exhaust or intake in ventilation systems
.Material: steel
.Colour: natural finish
.Composition: Pressed body made of aluminium fish duct connector with clips. Insectscreen fitted behind the face of the louver
.Mounting: To be fitted in ducts or round openings in external wall

SS-VS



.SS-VS: Stainless steel air exhaust and supply valves
.Application: Wall or ceiling mounted valves SS-VS are used for air supply or exhaust inside buildings.
.Material: Stainless steel
.Colour: Stainless steel, brushed finish
.Composition: Body, innercore and mounting frame made of stainless steel 304
.Mounting: To be mounted with clips inside mounting frame or straight into round ducts without the mounting frame.
Central core to be secured with counternut.
.Accessories: Standard mounting frame (included)




Type	A	B	C	
SS-VS100	94	118	52	60
SS-VS125	120	141	52	30
SS-VS150	145	162	62	24
SS-VS160	155	172	62	24
SS-VS200	195	228	74	24

SS-SV



.SS-SV: Circular fresh air intake or exhaust grilles made of stainless steel with bird mesh
.Application: For air intake or exhaust in ventilation systems
.Material: Stainless steel
.Colour: Brushed stainless steel natural finish
.Composition: Housing and bird mesh made of stainless steel. With duct connection flange. Mounting screws and drip nose included
.Mounting: Fitted into round ducts or round wall openings

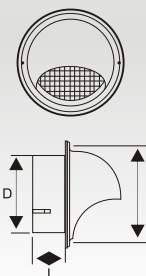


Model	D(mm)	L(mm)
SS-SV60	58	45
SS-SV80	77	45
SS-SV100	95	53
SS-SV125	120	53
SS-SV150	145	60
SS-SV160	155	60
SS-SV180	175	60
SS-SV200	195	60
SS-SV250	245	80
SS-SV300	295	80

SS-SVN



.SS-SVN: Stainless steel louvers with insectscreen and louver
.Application: For air intake or exhaust in ventilation systems
.Material: Stainless steel
.Colour: Brushed stainless steel natural finish
.Composition: Housing and enclined blades made of stainless steel. Insectscreen fitted behind the louver. Weather resistant blades under a 45° angle. With duct connection flange. Mounting screws and drip nose included
.Mounting: Fitted into round ducts or round wall openings

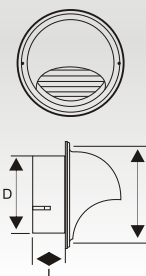

Model	D(mm)	L(mm)
SS-SVN60	58	45
SS-SVN80	77	45
SS-SVN100	95	53
SS-SVN125	120	53
SS-SVN150	145	60
SS-SVN160	155	60
SS-SVN180	175	60
SS-SVN200	195	60
SS-SVN250	245	80
SS-SVN300	295	80