

EDMF-150



Extra flat bathroom extractor fans with a modern appearance and design

- Architectural integration with the bathroom elements.
- Ultra-silent.
- Slimline design at just 17 mm thick.
- High performance thanks to its aerodynamic design.
- Can be easily and quickly installed.

Construction:


- White finish.
- Non-return damper incorporated in all models.
- Made with recyclable materials.

Version:

- BASIC: Works with the light switch or independently.
- TIMER: Works with an adjustable electronic timer.
- LL: Long life ball bearings.



CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M³

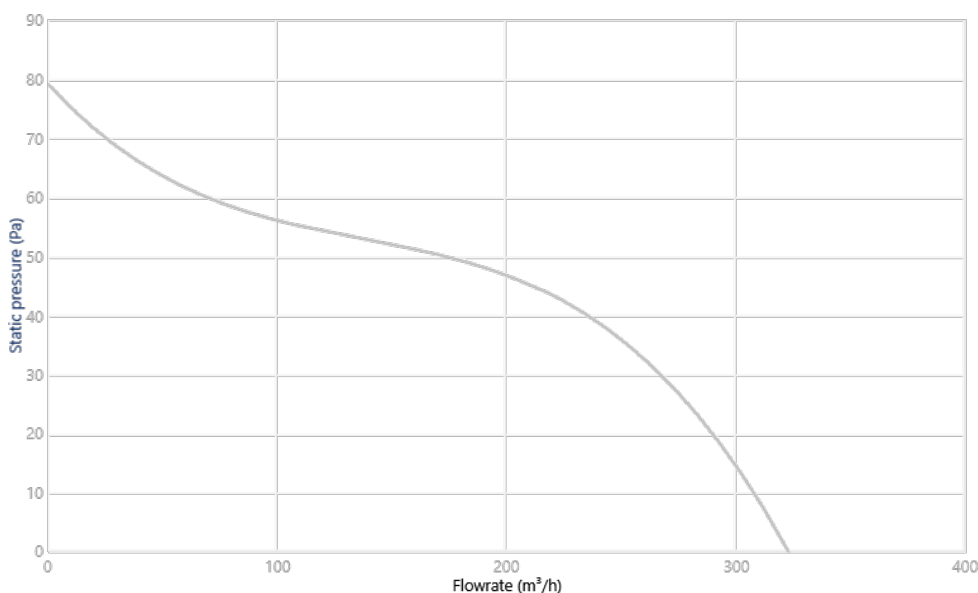


Design Point

Q (m³/h)	
Ps (Pa)	

Service Point (SP)

Q (m³/h)	-
Ps (Pa)	-
Pd (Pa)	-
Pt (Pa)	-

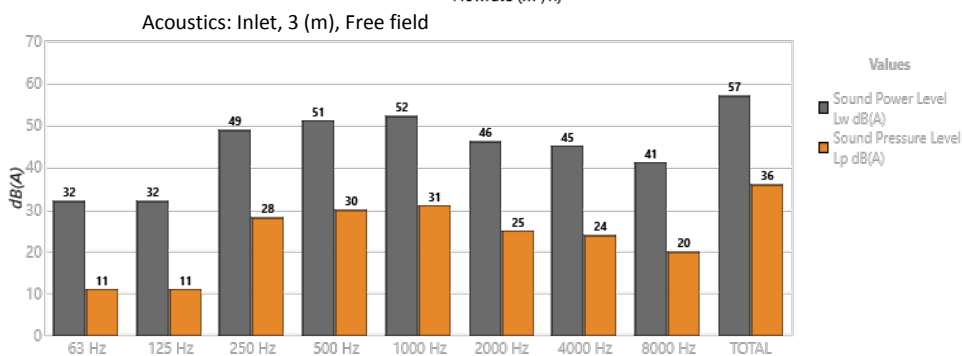

Band	Lw dB(A)	Lp dB(A)
63 Hz	32	11
125 Hz	32	11
250 Hz	49	28
500 Hz	51	30
1000 Hz	52	31
2000 Hz	46	25
4000 Hz	45	24
8000 Hz	41	20
TOTAL	57	36

TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	325
Speed (rpm)	2400
Maximum static pressure (Pa)	79.18
Maximum total pressure (Pa)	79.18

ERP

Remarks	ErP Exclude. Pe < 125 W
---------	-------------------------

MOTOR DATA

Max. Electrical Power (kW)	0.02
Hz/phases	50/1
Motor (rpm)	2400
Max. current (A) 220-240 V	0.13

Data can change, please check motor plate

DIMENSIONS

A	B	C	D
200	18	102	147

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

Approx. weight (kg)	0.9
---------------------	-----

