



## ADA Cool

### Air curtain for cold stores

Recommended installation height 2,5 m

ADA Cool keeps the cold air in cold stores and also makes it possible to have an open cold store area without doors. The cost of cooling is significantly reduced and the cold air stays where it is needed. ADA Cool reduces ice formation and condensation by the doorway and improves visibility when compared to plastic strips and fast folding doors.

- Specially designed outlet grilles for optimized performance.
- Compact and easily positioned.
- Easy installation with 1,8 m cable and plug.
- Several units can easily be linked together.
- Corrosion proof housing made of hot zinc-plate and powder enamelled steel panels. Colour: white, RAL 9016, NCS S 0500-N.



Optimized airflow with Thermozone technology.


### ✿ Ambient, no heat - ADA Cool

IP21

Type	Output [kW]	Airflow [m³/h]	Sound level* [dB(A)]	Voltage [V]	Amperage [A]	Length [mm]	Weight [kg]
<b>ADAC090</b>	0	1150	54	230V~	0,50	900	9,6
<b>ADAC120</b>	0	1400	51	230V~	0,55	1200	11,8


\*) Conditions: Distance to the unit 5 metres. Directional factor: 2. Equivalent absorption area: 200 m².

### Air velocity profile

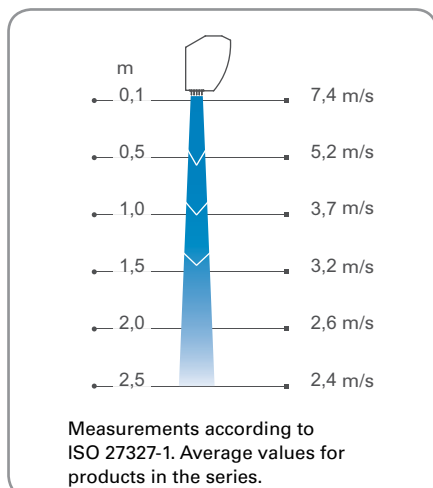

### Control

ADACR, 5-step fan speed control  
ADACR is a control and connection set consisting of a 5-step fan speed control, flexible cable and earthed plug. Can control a maximum of 7-9 units (max. 7 units at 60 Hz). Max input: 5 A. Dimensions: 200x105x105 mm. IP30.



Dimensions

